

39 - METRIC SHORT-REACH COMBINATION WRENCHES




Standards :


NF ISO 691, NF ISO 7738, NF ISO 3318, NF ISO 1711-1, E74-306, ISO 691, ISO 7738, ISO 3318, ISO 1711-1, DIN ISO 691, DIN 1711-1, ASME B107.100


Description :

- Short combination wrenches: the short handle and compact head allow for high handiness. Ideal for confined access. • OGV® profile with 12-point ring for powerful tightening while protecting the nut. H suffix = 6-point ring. • Ring head angled at 15°. • Open end head angled at 15°. • Metric sizes: 3.2 to 17 mm. • Presentation: satin chrome finish.

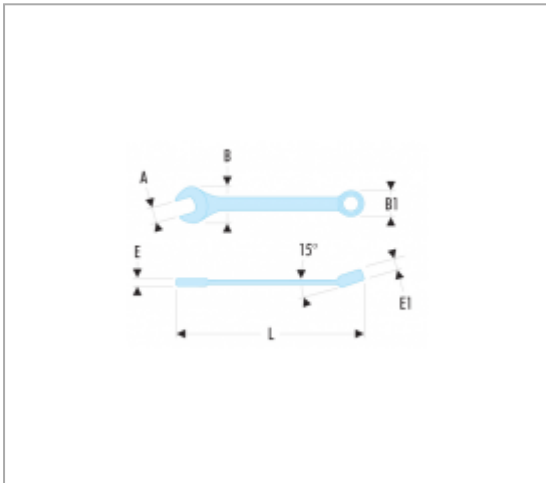

References :

	A [MM]	B X B1 [MM]	E [MM]	E1 [MM]	L [MM]	HEX SIZE - 12-POINT [MM]	[KG]
39.4H	4	10,0 x 8,0	3,1	3,1	77	6	0.010
39.5H	5	11,8 x 9,0	3,5	4,0	82	6	0.010
39.5,5H	5,5	11,8 x 9,5	3,5	4,0	84	6	0.010
39.6	6	15,0 x 10,4	4,1	5,0	90	12	0.015
39.7	7	15,0 x 11,5	4,1	5,0	90	12	0.015

	A [MM]	B X B1 [MM]	E [MM]	E1 [MM]	L [MM]	HEX SIZE - 12-POINT [MM]	[KG]
39.8	8	17,2 x 12,5	4,5	5,8	94	12	0.020
39.9	9	19,4 x 14,0	4,8	6,0	98	12	0.025
39.10	10	21,5 x 15,3	5,1	6,4	103	12	0.030
39.11	11	23,7 x 16,8	5,3	6,8	109	12	0.035
39.12	12	26,0 x 18,0	5,5	7,5	127	12	0.050
39.13	13	28,0 x 19,5	5,8	8,0	141	12	0.055
39.14	14	30,2 x 20,8	6,0	8,5	147	12	0.070
39.15	15	32,3 x 22,1	6,4	9,0	152	12	0.080
39.16	16	34,4 x 23,6	6,7	9,6	158	12	0.090
39.17	17	36,5 x 25,0	6,9	10,0	165	12	0.100
39.3,2H	3,2	10,0 x 7,0	3,1	3,1	77	6	0.010