

40.LA- METRIC LONG-REACH COMBINATION WRENCHES




Standards :


NF ISO 1711-1, NF ISO 3318, NF ISO 7738, ISO 1711-1, ISO 3318, ISO 7738, DIN ISO 691, DIN ISO 1711-1, DIN 3113, ASME B107.100

Description :

- Long combination wrenches: the extra-long handle passes high torque with minimum effort.
- OGV® profile with 12-point ring for powerful tightening while protecting the nut.
- Ring head angled at 15°.
- Open end head angled at 15°.
- Metric sizes: 19 to 65 mm.
- Presentation: satin chrome finish.

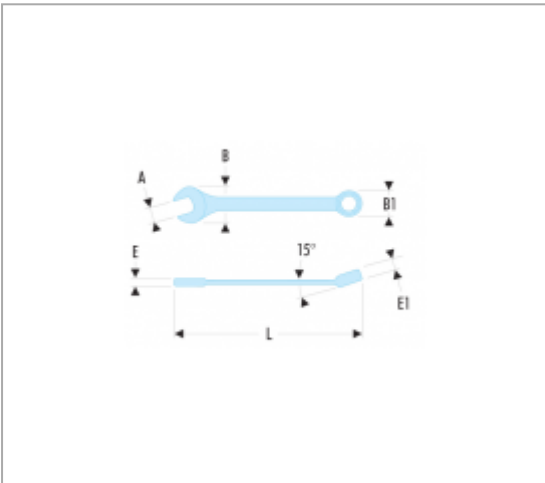

References :

	A [MM]	B X B1 [MM]	E [MM]	E1 [MM]	L [MM]	[KG]
40.19LA	19	45,0 x 29,6	8,7	12,0	329	0.240
40.23LA	23	53,0 x 35,4	10,3	14,5	381	0.370
40.26LA	26	59,0 x 39,4	11,5	15,5	420	0.520
40.28LA	28	62,4 x 42,2	12,3	16,5	446	0.600
40.29LA	29	62,4 x 42,2	12,3	16,5	446	0.600
40.21LA	21	49,0 x 32,3	9,5	13,0	355	0.305
40.22LA	22	51,0 x 33,8	9,9	14,0	368	0.360
40.24LA	24	55,0 x 36,9	10,7	15,0	394	0.455

	A [MM]	B X B1 [MM]	E [MM]	E1 [MM]	L [MM]	[KG]
40.27LA	27	61,0 x 40,6	11,9	16,0	433	0.590
40.42LA	42	62,4 x 42,2	12,3	16,5	615	1.720
40.30LA	30	65,0 x 45,2	13,1	17,0	472	0.800
40.46LA	46	62,4 x 42,2	12,3	16,5	680	2.435
40.50LA	50	65,0 x 45,2	13,1	17,0	732	3.500
40.32LA	32	69,5 x 47,8	13,2	18,0	498	0.850
40.55LA	55	42,0 x 84,5	21,5	31	760	3.900
40.34LA	34	51,0 x 33,8	9,9	14,0	524	1.040
40.60LA	60	44,0 x 90,0	23	32	800	4.900
40.41LA	41	61,0 x 40,6	11,9	16,0	615	1.720
40.65LA	65	49,7 x 98,0	24,5	32	840	6.000
40.33LA	33	49,0 x 32,3	9,5	13,0	498	0.850
40.35LA	35	53,0 x 35,4	10,3	14,5	524	1.040
40.36LA	36	55,0 x 36,9	10,7	15,0	550	1.200
40.38LA	38	59,0 x 39,4	11,5	15,5	576	1.435