

56A - INCH 10° HINGED SHORT-REACH RING WRENCHES




Standards :

ASME B107.100 GGG-W-636E

Description :

- Short-reach 10° offset-ring wrenches. Recess allows to pass fingers or an obstacle.
- The short-reach series increases accessibility.
- Ergonomic handle to apply torque while maintaining comfort of use.
- For 56A.3/16X7/32 6-point.
- OGV® profile 12-point ring for powerful tightening while protecting the nut.
- Inch sizes 3/16" to 13/16
- Satin chrome finish.

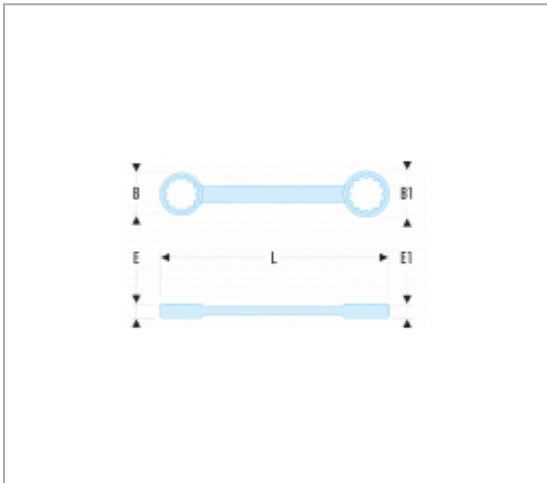

References :

	A ["]	B X B1 [MM]	E X E1 [MM]	L [MM]	[KG]
56A.3/16X7/32	3/16x7/32	8,7x9,5	5,4x5,9	100	0.024
56A.1/4X5/16	1/4x5/16	10,5x12,5	5,9x6,5	110	0.031
56A.5/16X3/8	5/16x3/8	12,5x14,6	6,5x7,6	115	0.045
56A.3/8X7/16	3/16x7/32	14,6x16,7	7,6x8,3	122	0.055
56A.7/16X1/2	7/16x1/2	16,7x19	8,3x9,3	130	0.068
56A.1/2X9/16	1/2x9/16	19x21	9,3x10,3	140	0.089
56A.9/16X5/8	9/16x5/8	21x23,3	10,3x11,5	145	0.103
56A.5/8X3/4	5/8x3/4	23,3x27,5	11,5x12,8	160	0.139

	A ["]	B X B1 [MM]	E X E1 [MM]	L [MM]	[KG]
56A.11/16X13/16	11/16x13/16	25,6x29,9	11,8x13	170	0.170