

66A - METRIC HINGED COMBINATION WRENCHES




Standards :

NF ISO 1711-1, NF ISO 691, ISO 1711-1, ISO 691, DIN ISO 1711-1, DIN ISO 691


Description :

- Hinged socket wrenches: the socket can be turned by 180° for maximum access.
- The socket is held in position tanks spring locking.
- OGV® profile with 12-point ring for powerful tightening while protecting the nut.
- Metric sizes: 6 to 23 mm.
- Presentation: satin chrome finish.

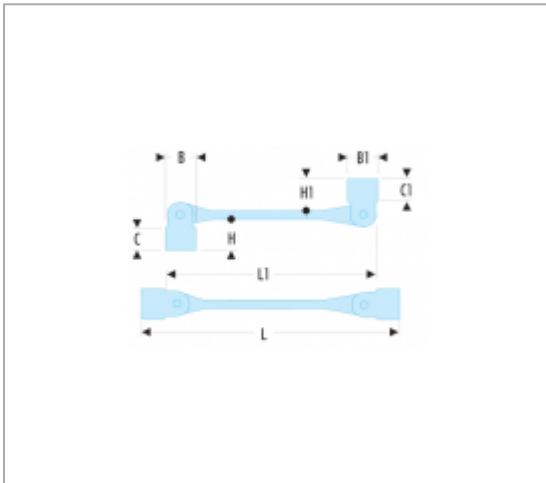

References :

	A [MM]	B X B1 [MM]	C X C1 [MM]	C1 [MM]	H X H1 [MM]	L [MM]	L1 [MM]	[KG]
66A.6X7	6x7	10,3 x 11,5	15 x 15		23,0 x 23,0	188,5	156	0.095
66A.8X9	8x9	12,6 x 13,85	15 x 15		23,0 x 23,0	188,5	156	0.100
66A.10X11	10x11	15,0 x 16,5	18 x 18		26,0 x 26,0	194,5	156	0.105
66A.10X13	10x13	15,0 x 19,0	21 x 21		31,0 x 31,0	233,5	189,5	0.190
66A.12X13	12x13	17,5 x 19,0	21 x 21		31,0 x 31,0	233,5	189,5	0.195

	A [MM]	B X B1 [MM]	C X C1 [MM]	C1 [MM]	H X H1 [MM]	L [MM]	L1 [MM]	[KG]
66A.14X15	14x15	20,5 x 21,75	23 x 23		33,0 x 33,0	237,5	231	0.215
66A.16X17	16x17	23,0 x 24,0	23 x 23		35,0 x 35,0	280,0	231	0.325
66A.16X18	16x18	23,0 x 24,7	23 x 24	23	35,0 x 36,0	281,0	231	0.330
66A.18X19	18x19	24,7 x 26,0	24 x 28		36,0 x 40,0	286,0	231	0.345
66A.20X22	20x22	27,3 x 30,5	28 x 28		41,5 x 41,5	329,0	270	0.515
66A.21X23	21x23	28,6 x 31,5	28 x 30		41,5 x 43,5	331,0	270	0.535