

## 74A - FORGED SOCKET WRENCHES WITH METRIC SCREWDRIVER HANDLE




### Standards :


NF ISO 2236, NF ISO 691, ISO 2236, ISO 691, DIN 3125, DIN ISO 691


### Description :

- Socket wrenches with screwdriver handle ideal for screws with limited access in height or precision mechanics.
- Protwist screwdriver handle for optimum comfort even for powerful unlocking.
- 6-point socket with deep opening for long threads.
- Forged body for maximum strength.
- Metric sizes: 3.2 to 14 mm.
- Presentation: satin chrome finish.

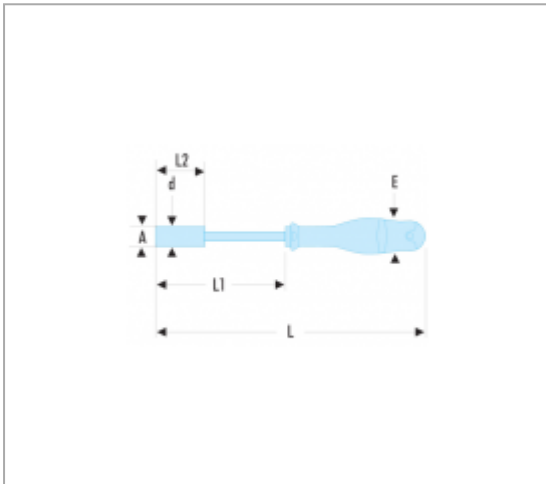

### References :

|  | A [MM] | D [MM] | E [MM] | L [MM] | L1 [MM] | L2 [MM] | [KG]  |
|---|--------|--------|--------|--------|---------|---------|-------|
| 74A.3,2   | 3,2    | 6,0    | 36     | 245    | 125     | 20      | 0.110 |
| 74A.4,5   | 4,5    | 7,5    | 36     | 245    | 125     | 25      | 0.120 |
| 74A.5,5   | 5,5    | 8,0    | 36     | 245    | 125     | 30      | 0.120 |
| 74AT.10   | 10,0   | 14,5   | 40     | 250    | 125     | 50      | 0.200 |
| 74AT.11   | 11,0   | 16,0   | 40     | 250    | 125     | 50      | 0.210 |
| 74AT.12   | 12,0   | 17,0   | 40     | 250    | 125     | 50      | 0.210 |
| 74AT.13   | 13,0   | 18,5   | 40     | 250    | 125     | 55      | 0.250 |

|  | A [MM] | D [MM] | E [MM] | L [MM] | L1 [MM] | L2 [MM] | [KG]  |
|---|--------|--------|--------|--------|---------|---------|-------|
| 74AT.14   | 14,0   | 20,0   | 40     | 250    | 125     | 55      | 0.255 |
| 74AT.4  | 4,0    | 7,0    | 36     | 245    | 125     | 20      | 0.115 |
| 74AT.5  | 5,0    | 8,0    | 36     | 245    | 125     | 25      | 0.120 |
| 74AT.6  | 6,0    | 9,5    | 36     | 245    | 125     | 35      | 0.125 |
| 74AT.7  | 7,0    | 9,5    | 36     | 245    | 125     | 35      | 0.130 |
| 74AT.8  | 8,0    | 12,0   | 36     | 245    | 125     | 50      | 0.155 |
| 74AT.9  | 9,0    | 12,0   | 36     | 245    | 125     | 50      | 0.160 |