

75 - FORGED METRIC 6 X 6 POINT ANGLED OPEN-SOCKET WRENCHES




Standards :


NF ISO 2236, NF ISO 691, ISO 2236, ISO 691, DIN ISO 691


Description :

- Angled socket wrenches: wrenches designed for powerful unlocking.
- Short head and long head: 6-point.
- Opening of the short head for passing threaded rods.
- Metric sizes: 6 to 38 mm.
- Presentation: satin chrome finish.

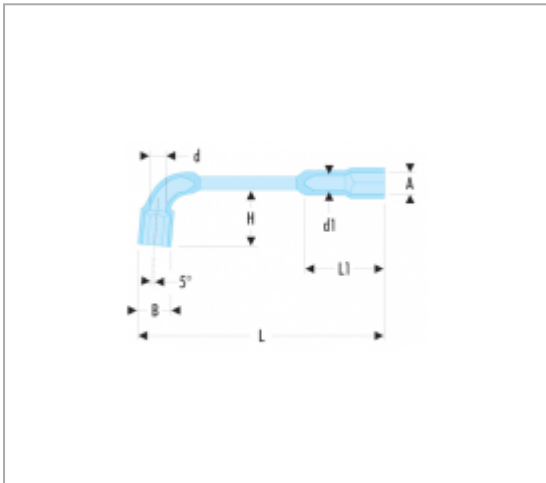

References :

	A [MM]	B [MM]	D [MM]	D1 [MM]	H [MM]	L [MM]	L1 [MM]	[KG]
75.6	6	10,0	4,5	4,5	15	102	21	0.030
75.7	7	11,0	4,5	4,5	17	106	22	0.035
75.8	8	12,5	7,0	6,0	19	114	25	0.060
75.9	9	13,5	7,0	6,0	20	122	26	0.065
75.10	10	15,0	8,0	7,0	24	129	28	0.095
75.11	11	16,5	8,0	7,0	25	136	30	0.115
75.12	12	18,0	9,0	8,0	28	144	36	0.155
75.13	13	19,5	9,0	8,0	30	152	38	0.175

	A [MM]	B [MM]	D [MM]	D1 [MM]	H [MM]	L [MM]	L1 [MM]	[KG]
75.14	14	21,0	10,5	9,0	32	160	40	0.205
75.15	15	22,5	10,5	10,0	34	169	42	0.230
75.16	16	24,0	13,0	12,0	37	178	46	0.285
75.17	17	25,5	13,0	12,0	39	187	48	0.315
75.18	18	26,5	13,0	12,0	40	195	50	0.365
75.19	19	28,5	15,0	12,0	41	204	51	0.430
75.20	20	29,5	15,0	13,0	43	212	53	0.440
75.21	21	30,5	15,0	14,0	46	221	55	0.490
75.22	22	32,0	15,0	14,0	48	230	57	0.535
75.23	23	33,5	18,0	15,0	51	240	64	0.625
75.24	24	34,5	18,0	16,0	54	250	67	0.660
75.25	25	36,0	20,0	17,0	56	260	69	0.785
75.26	26	37,0	20,0	17,0	57	270	70	0.795
75.27	27	38,0	22,0	19,0	58	280	73	0.950
75.28	28	39,5	22,0	19,0	60	290	75	0.950
75.29	29	41,0	22,0	19,0	62	300	76	1.000
75.30	30	42,0	24,0	21,0	64	310	83	1.300
75.31	31	43,5	24,0	22,6	70	320	86	1.400
75.32	32	44,5	24,0	22,6	74	330	88	1.400
75.33	33	46,0	27,0	24,0	79	340	92	1.500
75.34	34	47,0	27,0	24,0	80	350	95	1.600
75.35	35	48,5	27,0	24,0	81	360	96	1.600
75.36	36	49,5	27,0	24,0	82	370	97	1.700
75.38	38	52,0	28,0	25,0	85	390	99	2.100