

76 - FORGED METRIC 12 X 6 POINT ANGLED OPEN-SOCKET WRENCHES




Standards :


NF ISO 2236, NF ISO 691, ISO 2236, ISO 691, DIN ISO 691


Description :

- Angled socket wrenches: wrenches designed for powerful unlocking.
- 12-point short head for 30° increment and 6-point long head.
- Opening of the short head for passing threaded rods.
- Metric sizes: 6 to 38 mm.
- Presentation: satin chrome finish.

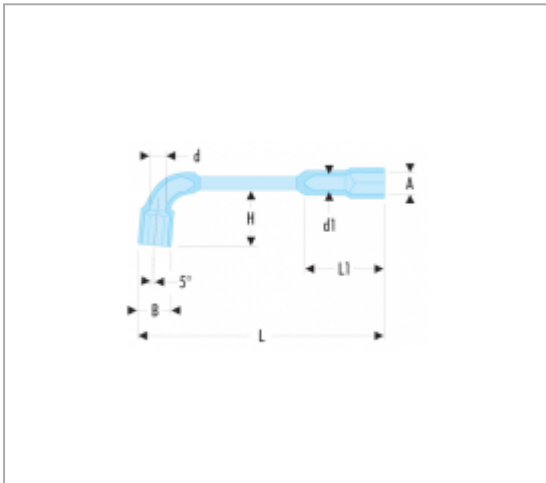

References :

	A [MM]	B [MM]	D [MM]	D1 [MM]	H [MM]	L [MM]	L1 [MM]	[KG]
76.6	6	10,0	4,5	4,5	16	102	21	0.030
76.7	7	11,0	4,5	4,5	17	106	22	0.035
76.8	8	12,5	7,0	6,0	19	114	25	0.060
76.9	9	13,5	7,0	6,0	20	122	26	0.065
76.10	10	15,0	8,0	7,0	24	129	28	0.095
76.11	11	16,5	8,0	7,0	25	136	30	0.115
76.12	12	18,0	9,0	8,0	28	144	36	0.155
76.13	13	19,5	9,0	8,0	30	152	38	0.175

	A [MM]	B [MM]	D [MM]	D1 [MM]	H [MM]	L [MM]	L1 [MM]	[KG]
76.14	14	21,0	10,5	9,0	32	160	40	0.205
76.15	15	22,5	10,5	10,0	34	169	42	0.230
76.16	16	24,0	13,0	12,0	37	178	46	0.285
76.17	17	25,5	13,0	12,0	39	187	48	0.315
76.18	18	26,5	13,0	12,0	40	195	50	0.365
76.19	19	28,5	15,0	12,0	41	204	51	0.430
76.20	20	29,5	15,0	13,0	43	212	53	0.440
76.21	21	30,5	15,0	14,0	46	221	55	0.490
76.22	22	32,0	15,0	14,0	48	230	57	0.535
76.23	23	33,5	18,0	15,0	51	240	64	0.625
76.24	24	34,5	18,0	16,0	54	250	67	0.660
76.25	25	36,0	20,0	17,0	56	260	69	0.785
76.26	26	37,0	20,0	17,0	57	270	70	0.795
76.27	27	38,0	22,0	19,0	58	280	73	0.950
76.28	28	39,5	22,0	19,0	60	290	75	0.950
76.29	29	41,0	22,0	19,0	62	300	76	1.000
76.30	30	42,0	24,0	21,0	64	310	83	1.300
76.31	31	43,5	24,0	22,6	70	320	86	1.400
76.32	32	44,5	24,0	22,6	74	330	88	1.400
76.33	33	46,0	27,0	24,0	79	340	92	1.500
76.34	34	47,0	27,0	24,0	80	350	95	1.600
76.35	35	48,5	27,0	24,0	81	360	96	1.600
76.36	36	49,5	27,0	24,0	82	370	97	1.700
76.38	38	52,0	28,0	25,0	85	390	99	2.100