

94A - WRENCHES ENGAGED IN TUBE WITH METRIC SCREWDRIVER HANDLE




Standards :


NF ISO 2236, NF ISO 691, ISO 2236, ISO 691, DIN 3125, DIN ISO 691


Description :

- Wrenches engaged in tube with screwdriver handle: ideal for screws with limited access in height or precision mechanics.
- Tube body to allow unlocking on very long threaded rods.
- Metric sizes: 3.2 to 14 mm.
- Presentation: satin chrome finish.

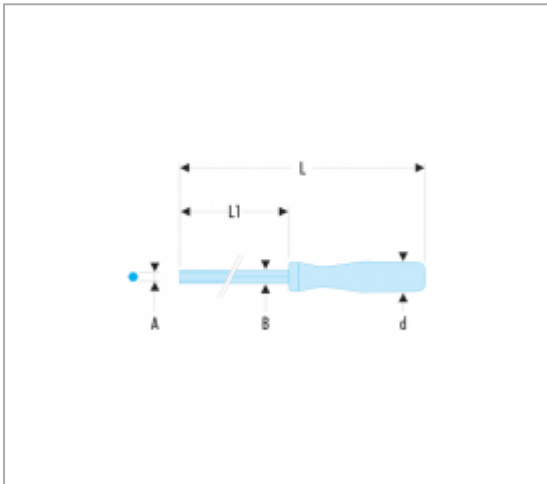

References :

	A [MM]	B [MM]	D [MM]	L [MM]	L1 [MM]	[KG]
94A.4	4	7	25	225	125	0.075
94A.5	5	7	25	225	125	0.080
94A.6	6	9	28	235	125	0.110
94A.7	7	9	28	235	125	0.125
94A.8	8	11	28	235	125	0.150
94A.9	9	11	28	235	125	0.160
94A.10	10	13	32	245	125	0.165

	A [MM]	B [MM]	D [MM]	L [MM]	L1 [MM]	[KG]
94A.11	11	13	32	245	125	0.245
94A.12	12	16	39	260	125	0.260
94A.13	13	16	39	260	125	0.275
94A.14	14	18	39	260	125	0.280
94A.3,2	3,2	7	25	225	125	0.070
94A.5,5	5,5	7	25	225	125	0.100