

97 - METRIC FORGED DOUBLE SOCKET WRENCHES




Standards :


NF ISO 2236, NF ISO 691, ISO 2236, ISO 691, DIN 896, DIN ISO 691


Description :

- Double socket wrenches: full opening of the wrench allows passage of very long threaded rods.
- The forged hexagonal body allows tightening with a wrench.
- Passage hole allowing to use shanks: 160A.
- Shank to use: 160A.1 for the dimensions 6x7 à 21x23 mm; 160A.2 for the dimensions 24x26 to 30x32 mm.
- 6-point heads.
- 2 dimensions per wrench.
- Metric sizes: 6 to 32 mm.
- Presentation: satin chrome finish.

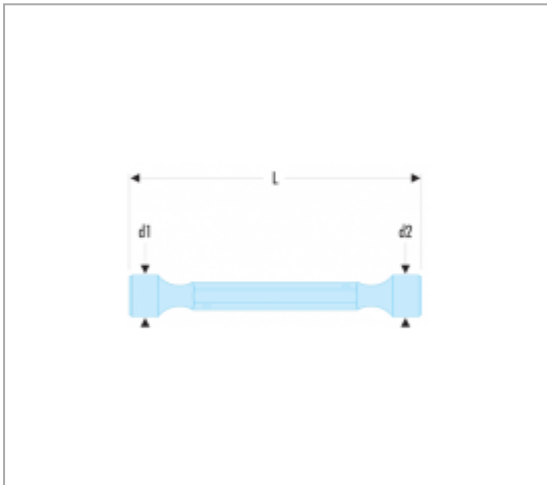

References :

	A [MM]	D [MM]	D1 [MM]	D1 X D2 [MM]	D2 [MM]	L [MM]	[KG]
97.6X7	6x7	4,0	9,5	9,5 x 10,7	10,7	110	0.035
97.8X9	8x9	4,0	12,5	12,5 x 14	14,0	120	0.050
97.10X11	10x11	6,0	15,0	15 x 16	16,0	130	0.065
97.12X13	12x13	6,0	17,5	17,5 x 19	19,0	140	0.110
97.14X15	14x15	6,5	20,0	20 x 21,5	21,5	150	0.140
97.16X17	16x17	8,2	22,7	22,7 x 24	24,0	160	0.190

	A [MM]	D [MM]	D1 [MM]	D1 X D2 [MM]	D2 [MM]	L [MM]	[KG]
97.18X19	18x19	8,2	25,2	25,2 x 26,5	26,5	170	0.240
97.20X22	20x22	10,2	27,7	27,7 x 30,2	30,2	180	0.260
97.21X23	21x23	10,2	29,0	29 x 31,2	31,2	185	0.295
97.24X26	24x26	12,5	33,0	33 x 35,5	35,5	190	0.415
97.27X29	27x29	12,5	37,0	37 x 39,5	39,5	200	0.505
97.30X32	30x32	12,5	40,5	40,5 x 43	43,0	200	0.630