


AR - ISORYL SCREWDRIVERS FOR SLOTTED-HEAD SCREWS - MILLED BLADE

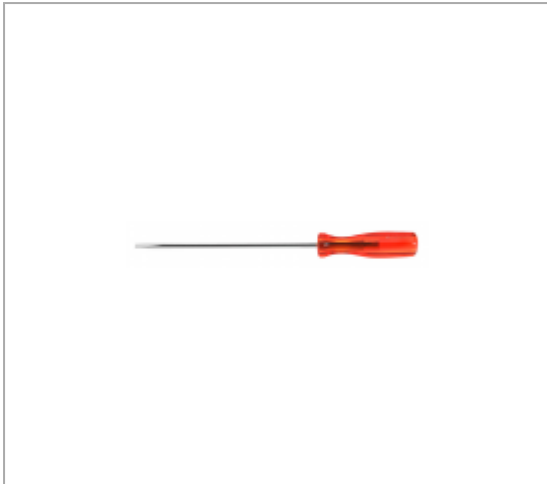


Standards :

NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600


Description :

- Round blade milled for access to the bottom of the well.
- Finish: polished chromed.

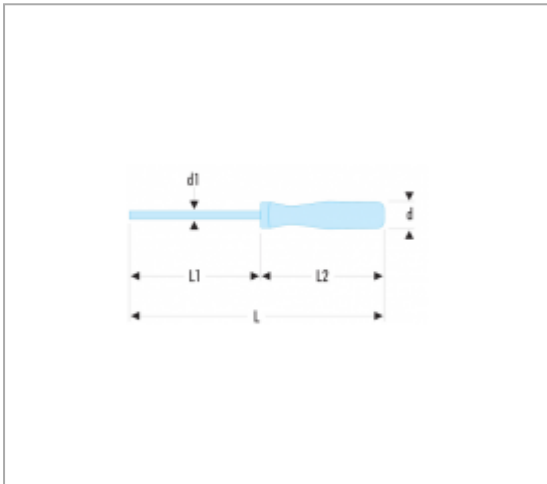

References :

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
AR.2X40	2,0	16	2,0 x 40	0,4	110	70	13
AR.2,5X50	2,5	16	2,5 x 50	0,4	120	70	15
AR.2,5X75	2,5	16	2,5 x 75	0,4	145	70	16
AR.3X75	3,0	16	3,0 x 75	0,5	145	70	17
AR.3,5X75	3,5	20.5	3,5 x 75	0,6	155	80	31
AR.3,5X100	4,0	20.5	3,5 x 100	0,8	180	80	33

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
AR.4X100	4,0	24	4,0 x 100	0,8	190	90	45
AR.4X150	4,0	24	4,0 x 150	0,8	240	90	50
AR.5,5X100	5,5	28	5,5 x 100	1,0	200	100	71
AR.5,5X150	5,5	28	5,5 x 150	1,0	250	100	80
AR.5,5X200	5,5	28	5,5 x 200	1,0	300	100	89
AR.6,5X100	6,5	30	6,5 x 100	1,2	210	110	102
AR.6,5X150	6,5	30	6,5 x 150	1,2	260	110	114
AR.6,5X200	6,5	30	6,5 x 200	1,2	310	110	226
AR.8X150	8,0	30	8,0 x 150	1,2	260	110	141