

## AS - ASF - PROTWIST® SCREWDRIVERS WITH SAND-BLASTED TIP FOR SLOTTED HEAD SCREWS




### Standards :


NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600


### Description :

- ASF: forged blade.
- Silicon carbon blade: strong and resistant to flexion.
- Bi-material grip resists to impacts, abrasion, and chemicals.
- Finish: sand-blasted tip gloss chromed blade.

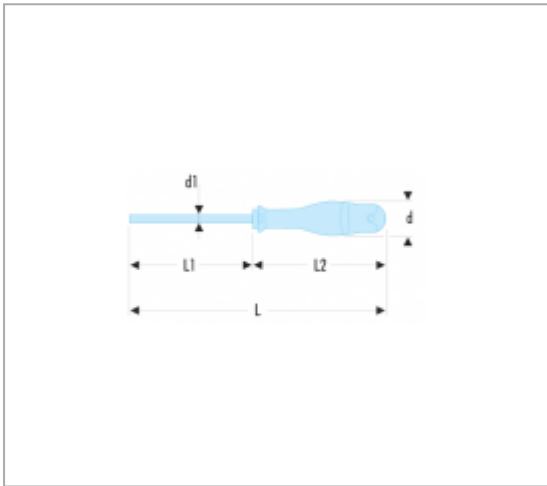

### References :

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	CONTAINER	[G]
AS2,5X75	2,5	19	2,5 x 75	0,4	170	95		21
AS3,5X75	3,5	25	3,5 x 75	0,6	179	104		41
AS3,5X100	3,5	25	3,5 x 100	0,6	204	104		43
AS5,5X100	5,5	30	5,5 x 100	1,0	210	110		82
AS5,5X150	5,5	30	5,5 x 150	1,0	260	110		91

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	CONTAINER	[G]
ASF6,5X150	6,5	36	6,5 x 150	1,2	270	120	Box	140
ASF5,5X100	5,5	30	5,0 x 100	1,0	210	110	Box	76
ASF6,5X150	6,5	36	6,0 x 150	1,2	270	120	Roll: N.38A-8C	120
AS4X100	4,0	30	4,0 x 100	0,8	209	109		47
ASF8X150	8,5	40	7,0 x 150	1,2	275	125		149
ASF10X200	10,0	40	9,0 x 200	1,6	325	125		214