


AT - PROTWIST® SCREWDRIVERS FOR SLOTTED HEAD SCREWS - SHORT BLADES

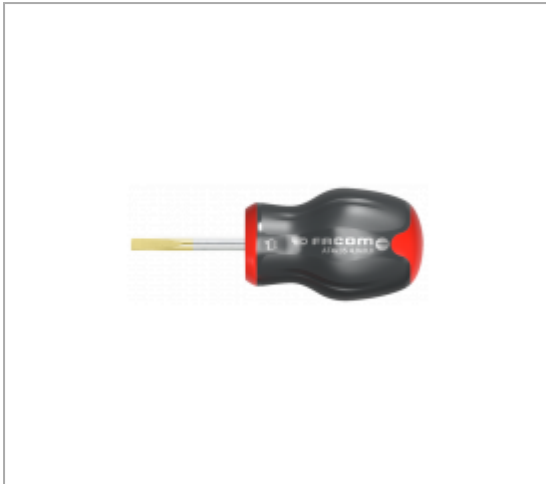


Standards :

NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600

Description :

- Short round blade and ball handle for use in confined spaces.
- Inline Hardening Process – +50% Tip Life and +100% Bar Strength.
- Handle Material - Softer for more Comfort and still Chemical Resistant.
- Blade " tri-coating " treatment (Zinc-Nickel-Chromium) - 4x Corrosion Resistance.
- Handle 'Channel' - +10% Torque.
- Laser Marking - gives virtually Permanent Marking.
- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.

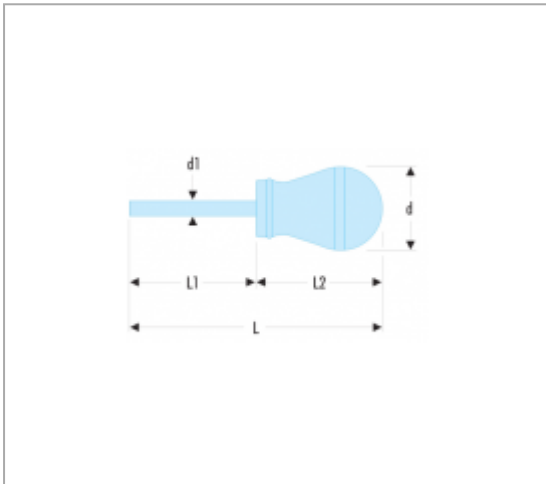

References :

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
AT4X25	4,0	36	4,0 x 25	0,8	81	56	35
AT5.5X35	5,5	36	5,5 x 35	1,0	91	56	41
AT4X35	4,0	36	4,0 x 35	0,8	91	56	36
AT6.5X35	6,5	36	6,5 x 35	1,2	91	56	46