


## ATF - PROTWIST® SCREWDRIVERS FOR SLOTTED HEAD SCREWS - FORGED BLADES

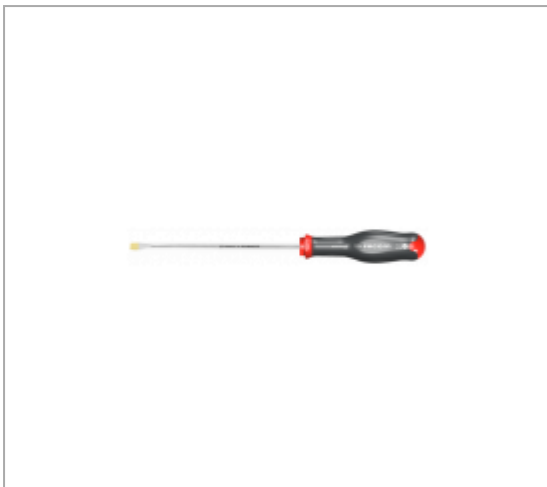


### Standards :

NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600


### Description :

- Forged blade with excellent tip fibre for high torsion strength.
- Extra-long shank up to 250 mm for difficult and remote access.
- Inline Hardening Process – +100% Tip Life and +100% Bar Strength.
- Handle Material - Softer for more Comfort and still Chemical Resistant.
- Blade " tri-coating " treatment (Zinc-Nickel-Chromium) - 4x Corrosion Resistance.
- Handle 'Channel' - +10% Torque.
- Laser Marking - gives virtually Permanent Marking.
- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.

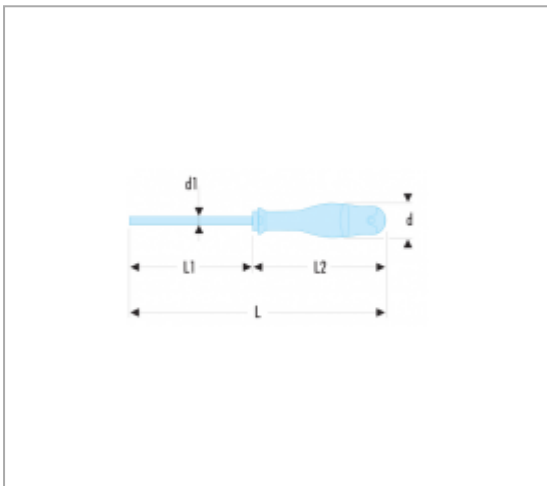

### References :

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
ATF5.5X100	5,5	30	5,5 x 100	1,0	209	109	76
ATF5.5X150	5,5	30	5,5 x 150	1,0	259	109	84
ATF6.5X100	6,5	36	6,0 x 100	1,2	220	120	120
ATF10X250	10,0	40	9,0 x 250	1,6	375	125	268
ATF10X200	10,0	40	9,0 x 200	1,6	325	125	214

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
ATF8X150	8,0	40	7,0 x 150	1,2	275	125	149
ATF6.5X150	6,5	36	6,0 x 150	1,2	270	120	131
ATF8X200	8,0	40	7,0 x 200	1,2	325	125	164