

ATWH.CK - PROTWIST® SHOCK SCREWDRIVERS FOR SLOTTED HEAD SCREWS




Standards :


NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600


Description :

- Impact Zone with Steel Strike - hexagonal blade with 73MO steel.
- Hexagonal blade with shoulder to take a wrench.
- Extra-long blade for use in confined spaces.
- Inline Hardening Process – +100% Tip Life and +100% Bar Strength.
- Handle Material - Softer for more Comfort and still Chemical Resistant.
- Golden electroplated Tip - 4x Corrosion Resistance.
- Handle 'Channel' - +10% Torque.
- Laser Marking - gives virtually Permanent Marking.
- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.

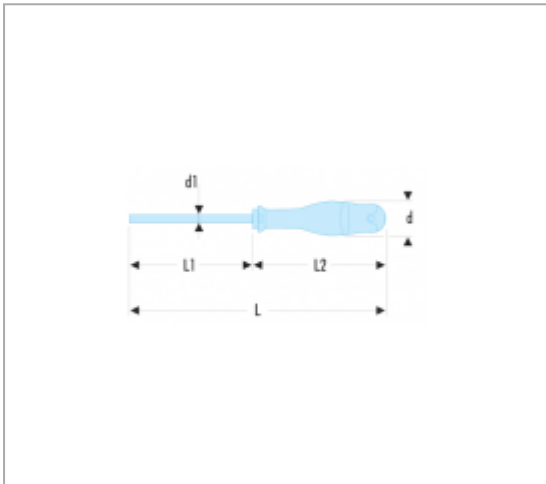

References :

	A [MM]	D [MM]	D1 X L1 [MM]	D2 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
ATWH10X175CK	10,0	40	7 x 175	14	1,6	300	125	195
ATWH12X200CK	12,0	40	10 x 200	14	2,0	325	125	292
ATWH14X250CK	14,0	40	10 x 250	16	2,5	375	125	322
ATWH5.5X125CK	5,5	25	4 x 100	8	1,0	204	104	57
ATW4X100CK	4,0	25	4,1 x 100	-	0,8	204	104	57

	A [MM]	D [MM]	D1 X L1 [MM]	D2 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
ATWH6.5X150CK	6,5	30	5 x 125	10	1,2	235	110	88
ATWH8X175CK	8,0	36	6 x 150	11	1,2	270	120	147