

ATWH - PROTWIST® SCREWDRIVERS FOR SLOTTED HEAD SCREWS - POWER SERIES




Standards :


NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600


Description :

- Hexagonal blade with shoulder to take a wrench.
- Extra-long shank up to 250 mm for difficult and remote access.
- Inline Hardening Process – +50% Tip Life and +100% Bar Strength.
- Handle Material - Softer for more Comfort and still Chemical Resistant.
- Blade " tri-coating " treatment (Zinc-Nickel-Chromium) - 4x Corrosion Resistance.
- Handle 'Channel' - +10% Torque.
- Laser Marking - gives virtually Permanent Marking.
- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.

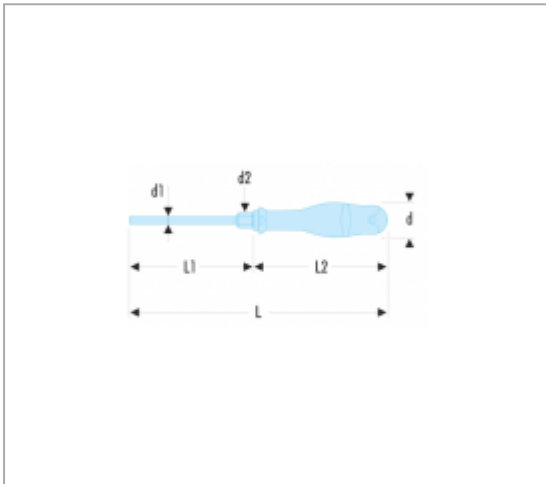

References :

	A [MM]	D [MM]	D1 X L1 [MM]	D2 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
ATWH5.5X125	5,5	30	5 x 125	8	1,0	234	109	90
ATWH6.5X150	6,5	36	6 x 150	10	1,2	270	120	135
ATWH8X175	8,0	40	7 x 175	11	1,2	300	125	160
ATWH12X200	12,0	40	10 x 200	14	2,0	325	125	350
ATWH12X250	12,0	40	10 x 250	14	2,0	375	125	375

	A [MM]	D [MM]	D1 X L1 [MM]	D2 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
ATWH14X250	14,0	40	12 x 250	16	2,5	375	125	450
ATWH10X175	10,0	40	9 x 175	14	1,6	300	125	320
ATWH8EX175	8,0	40	8 x 175	12	1,6	300	125	220