

ATWPH.CK - PROTWIST® SHOCK SCREWDRIVERS FOR PHILLIPS® SCREWS




Standards :


NF ISO 8764-1, NF ISO 8764-2, ISO 8764-1, ISO 8764-2, DIN ISO 8764-1, DIN ISO 8764-2, ASME B107.600

Description :

- Impact Zone with Steel Strike - hexagonal blade with 73MO steel.
- Hexagonal blade with shoulder to take a wrench.
- Extra-long blade for use in confined spaces.
- Inline Hardening Process – +100% Tip Life and +100% Bar Strength.
- Handle Material - Softer for more Comfort and still Chemical Resistant.
- Golden electroplated Tip - 4x Corrosion Resistance.
- Handle 'Channel' - +10% Torque.
- Laser Marking - gives virtually Permanent Marking.
- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.

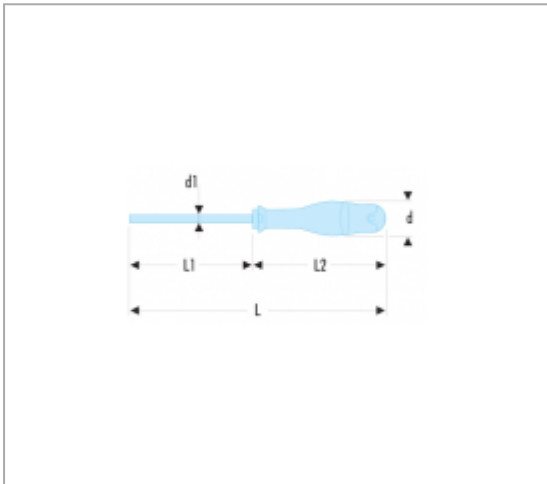

References :

	D [MM]	D1 X L1 [MM]	L [MM]	L2 [MM]	PHILLIPS [NO]	[G]
ATWPH3X150CK	40	8 x 150	275	125	PH3	200
ATWPH1X100CK	30	5 x 100	209	109	PH1	70
ATWPH2X125CK	36	6 x 125	245	120	PH2	130