

KM.B - HIGH-TORQUE WRENCHES WITH DRIVE SQUARE




Standards :

NF EN ISO 6789, ISO 6789, DIN EN ISO 6789

Description :

- Accuracy: $\pm 4\%$ value displayed.
- Two reading scales: N.m and lbf.ft.
- Large size dial.
- Light alarm when reaching torque.
- Cylindrical attachment diameter 30 mm.
- Numbered wrenches supplied with calibration certificate.
- Wrenches supplied in metal case with storage module, dim. (L. x W. x H.): 760 x 220 x 140 mm.

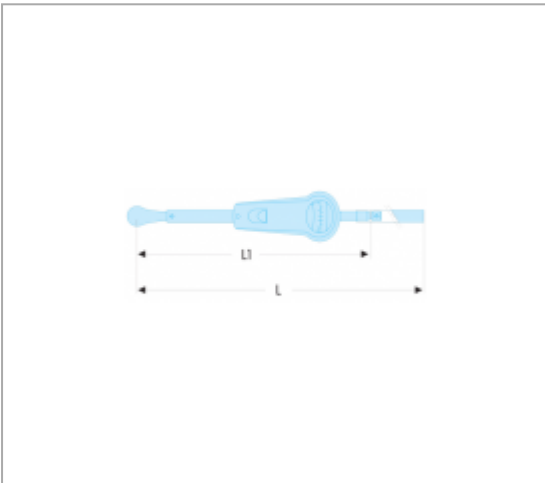

References :

	L [MM]	L1 [MM]	L1 X L2 [MM]	BOX	CAPACIT [LBF.FT]	CAPACIT [N.M]	SQUARE	SQUAR ["]	WRENCH	H
K.200B	1019	595	595-1019	BT.102	150 - 650	175 - 900	H.200E	3/4	K.200DB	K
K.202B	1019	595	595-1019	BT.102	250 - 1100	300 - 1500	K.200E	3/4	K.202DB	K
M.200B	-	724	724	BT.102	300 - 1800	500 - 2500	M.200EA	1	M.200DB	-