

J.F - 3/8" DRIVE HINGED INCH 12-POINT SOCKETS




Standards :


ASME B107.1

Description :

- OGV® profile: more powerful tightening, preserves fasteners.
- Compact solution used instead of universal joint.
- Finish: bright chrome.

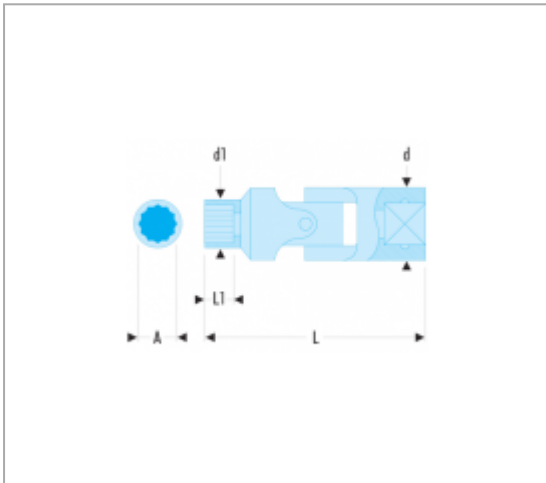

References :

	A ["]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[G]
J.1/2F	1/2	19	18,3	30	11,3	12	36
J.11/16F	11/16	19	24,00	33	13,8	12	74
J.3/4F	3/4	19	25,8	33	15,8	12	76
J.3/8F	3/8	19	14,0	27	8,3	12	26
J.5/8F	5/8	19	22,00	30	12,8	12	46
J.7/16F	7/16	19	15,8	27	9,8	12	27
J.9/16F	9/16	19	19,5	30	11,3	12	34