

J.HLA - 3/8" LONG-REACH METRIC 6-POINT SOCKETS




Standards :

NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5


Description :

- OGV® profile: more powerful tightening, preserves fasteners.
- Long-reach sockets for long recess or thread access.
- Available as rack set Ref JL.40E (7 --> 15 mm) and Ref RL.41E (16 --> 24 mm).
- Finish: bright chrome.

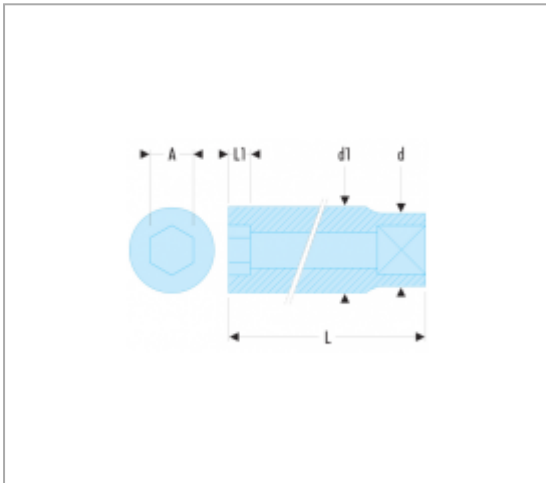

References :

|  | A [MM] | D [MM] | D1 [MM] | L [MM] | L1 [MM] | HEX SIZE [MM] | [G] |
|---|--------|--------|---------|--------|---------|---------------|-----|
| J.7HLA | 7 | 17,3 | 10,6 | 55 | 6,0 | 6 | 44 |
| J.8HLA | 8 | 17,3 | 12,0 | 55 | 7,5 | 6 | 46 |
| J.9HLA | 9 | 17,3 | 13,0 | 55 | 7,5 | 6 | 47 |
| J.10HLA | 10 | 17,3 | 14,5 | 55 | 9,0 | 6 | 50 |
| J.11HLA | 11 | 17,3 | 16,0 | 55 | 10,5 | 6 | 53 |
| J.12HLA | 12 | 17,2 | 16,8 | 55 | 12,0 | 6 | 53 |
| J.13HLA | 13 | 17,0 | 18,0 | 55 | 12,0 | 6 | 54 |
| J.14HLA | 14 | 18,0 | 20,0 | 55 | 15,0 | 6 | 60 |

|  | A [MM] | D [MM] | D1 [MM] | L [MM] | L1 [MM] | HEX SIZE [MM] | [G] |
|---|--------|--------|---------|--------|---------|---------------|-----|
| J.15HLA | 15 | 20,0 | 21,0 | 60 | 15,0 | 6 | 75 |
| J.16HLA | 16 | 20,0 | 22,0 | 60 | 15,0 | 6 | 85 |
| J.17HLA | 17 | 22,0 | 23,5 | 60 | 15,0 | 6 | 102 |
| J.18HLA | 18 | 23,0 | 24,5 | 60 | 18,0 | 6 | 109 |
| J.19HLA | 19 | 24,0 | 25,0 | 60 | 18,0 | 6 | 110 |
| J.21HLA | 21 | 26,0 | 27,0 | 60 | 18,0 | 6 | 123 |
| J.22HLA | 22 | 28,0 | 29,0 | 60 | 21,0 | 6 | 150 |
| J.24HLA | 24 | 30,0 | 31,0 | 60 | 24,0 | 6 | 176 |