

R.E 1/4" DRIVE METRIC 12-POINT SOCKETS




Standards :


NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5

Description :

- OGV® profile: more powerful tightening, preserves fasteners.
- Finish: bright chrome.

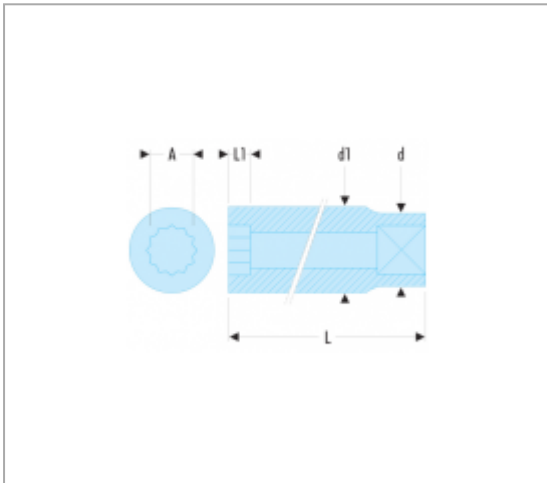

References :

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[KG]
R.10E	10,0	14,7	14,7	7,80	22	7.8	12	0.018
R.11E	11,0	15,8	15,8	9	22	9	12	0.019
R.12E	12,0	17,0	17,0	9,50	22	9.5	12	0.023
R.13E	13,0	17,7	17,7	10	22	10	12	0.024
R.14E	14,0	18,7	18,7	10	22	10	12	0.026
R.6E	6,0	11,2	9,4	5,60	22	5.6	12	0.009
R.7E	7,0	11,0	11,0	6	22	6	12	0.009
R.8E	8,0	12,0	12,0	6,50	22	6.5	12	0.011

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[KG]
R.9E	9,0	13,2	13,2	6,50	22	6.5	12	0.014
R.5,5E	5,5	11,2	8,8	4,80	22	4.8	12	0.008