


JX - 3/8" TORX® DRIVE SOCKETS




Description :

- Removable bits. • J.236 socket. • Finish: bright chrome with phosphate-hardened tip.

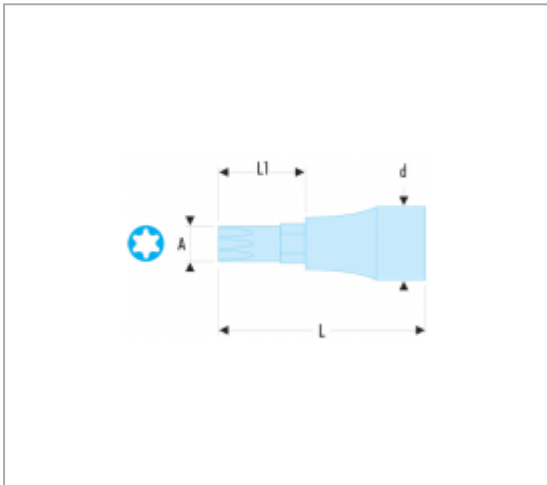

References :

	A [MM]	L [MM]	L1 [MM]	TORX [NO]	SOCKET	BITS	NO.	[G]
JX.10	2,72	46,0	16,0	T10	J.235	EX.110	T10	34
JX.15	3,26	46,0	16,0	T15	J.235	EX.115	T15	34
JX.20	3,84	46,0	16,0	T20	J.235	EX.120	T20	34
JX.25	4,40	46,0	16,0	T25	J.235	EX.125	T25	34
JX.27	4,96	46,0	16,0	T27	J.235	EX.127	T27	34
JX.30	5,49	46,0	16,0	T30	J.235	EX.130	T30	34
JX.40	6,60	52,5	22,5	T40	J.236	EX.240	T40	45
JX.45	7,77	52,5	22,5	T45	J.236	EX.245	T45	45

	A [MM]	L [MM]	L1 [MM]	TORX [NO]	SOCKET	BITS	NO.	[G]
JX.50	8,79	52,5	22,5	T50	J.236	EX.250	T50	18
JX.55	11,17	52,5	22,5	T55	J.236	EX.255	T55	61