


1224 - WORKSITE-MAINTENANCE 360° SWIVEL VICES



Description :

- Vices in spheroid graphite cast iron, tensile strength 700 N/mm² minimum.
- Wide bearing base of the prism guide/mobile jaw: lack of guide flexion, vice operation preserved even under heavy loads.
- Interchangeable parallel jaws. High wear resistance, hardness 48/53 HRc.
- Removable V-shaped jaws for tightening the pipes. Hardness 40/46 HRc.
- Adjustment system by 2 complex gap compensation screws.
- Burnished control bar.

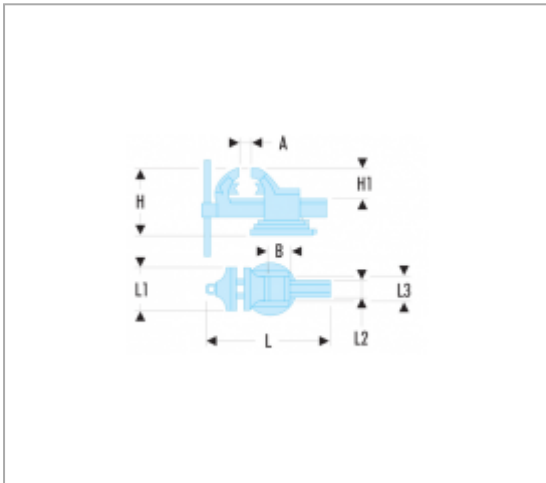

References :

	A MAXI [MM]	B [MM]	H [MM]	H1 [MM]	L [MM]	L1 [MM]	L2 [MM]	L3 [MM]	[KG]
1224.100	125	63	164	74	345	104	51	70	9,70
1224.125	150	75	178	83	380	127	53	76	12,84
1224.150	200	95	205	94	460	154	60	91	18,88
1224.175	235	118	241	123	532	178	68	111	26,36