

181A.SLS - LOCKING TWIN SLIP-JOINT MULTIGRIP PLIERS




Standards :


NF ISO 8976, ISO 8976, DIN ISO 8976, ASME B107.500

Description :

- Tool equipped with a FACOM SLS attachment solution, preventing any risk of accidental falls.
- The crimped "rotating" cable solution, selected and tested by FACOM, maintains user ergonomics.
- Fast, precise push-button adjustment with safety lock.
- 12-position notches.
- The closed position of the ergonomic comfort grip handles increases the tightening power.
- High torsional strength.
- Slim-profile self-gripping nose.
- 62 HRc high-frequency treated jaws.
- Finish: - Chrome, bi-material ergonomic grips.

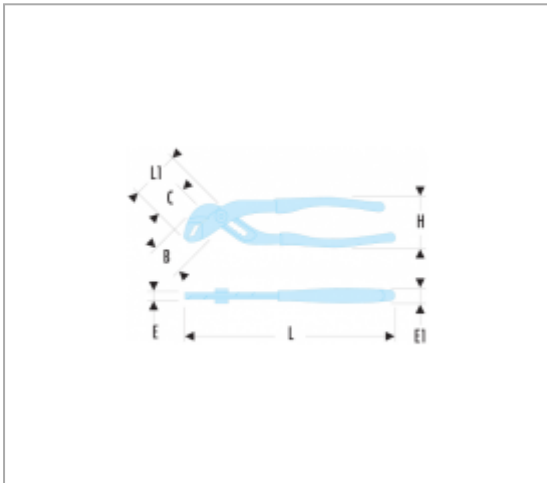

References :

	B [MM]	C [MM]	E [MM]	E1 [MM]	L [MM]	L1 [MM]	CAPACIT NUTS [MM]	CAPACIT MAXI TUBE [MM]	[G]
181A.18CPESLS	22	24	7,5	20,0	185	48	36	36	255
181A.25CPESLS	28	28	7,5	22,5	245	54	41	42	385