

## 440F - METRIC COMBINATION WRENCHES - FLUO




### Standards :


NF ISO 691, NF ISO 7738, NF ISO 3318, NF ISO 1711-1, E74-306, ISO 691, ISO 7738, ISO 3318, ISO 1711-1, DIN ISO 691, DIN ISO 1711-1, DIN 3113, ASME B107.100.


### Description :

- Detect the tool thanks to its fluorescence, activated by a lamp or UV neon light. Detectable in black or dark environment up to 5 meters.
- Standard wrench for all current applications.
- High mechanical strength combined with compact size meeting aeronautical standards.
- Ring head: - Ring open end (size E) designed for better access to series or embedded screws.
- OGV® profile with 12-point ring for powerful tightening while protecting the nut.
- H suffix = 6-point ring.
- Ring head angled at 15°.
- Open end head: - Open end angled at 15°.
- Open end head-handle geometry optimised for increased access.
- Metric sizes: 4 to 19 mm.
- Presentation: satin chrome finish.

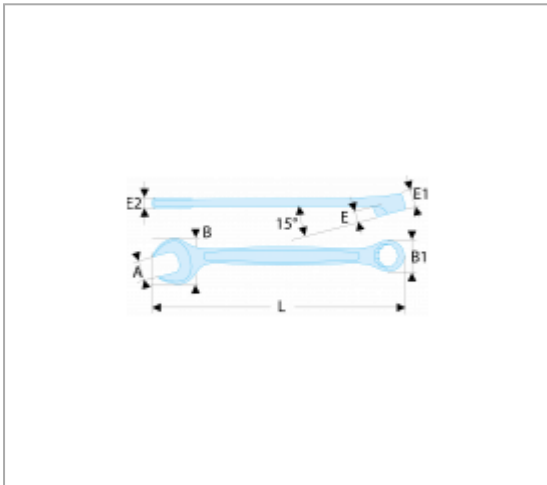

### References :

	A [MM]	B [MM]	B1 [MM]	E [MM]	E1 [MM]	E2 [MM]	L [MM]	[G]
440.10F	10	23,0	15,0	4,2	7,6	5,2	145	40
440.11F	11	24,5	16,9	4,6	8,1	5,5	155	50
440.12F	12	27,0	18,0	4,4	8,4	5,8	162	60
440.13F	13	28,7	19,3	4,8	8,6	6,1	170	70
440.14F	14	31,0	21,1	5,7	9,5	6,4	180	85
440.16F	16	35,6	23,9	6,4	10,5	7,3	195	115
440.17F	17	37,0	25,3	6,5	10,9	7,6	202	130
440.15F	15	32,6	22,2	5,9	10,0	6,8	185	95

	A [MM]	B [MM]	B1 [MM]	E [MM]	E1 [MM]	E2 [MM]	L [MM]	[G]
440.18F	18	38,7	26,0	7,2	11,4	8,1	208	150
440.19F	19	41,2	27,8	7,2	11,9	8,3	216	170
440.4HF	4	10,0	7,8	2,1	3,5	3,0	106	10
440.5HF	5	13,3	9,2	3,1	6,0	3,6	115	15
440.6F	6	14,1	10,0	3,1	6,0	3,8	115	20
440.7F	7	17,2	11,2	3,4	6,2	3,9	122	20
440.8F	8	19,2	12,8	3,5	6,7	4,7	133	30
440.9F	9	21,2	14,2	3,9	7,1	4,7	138	35
440.5,5HF	5,5	13,3	9,2	3,1	6,0	3,8	115	15