

ANF - PROTWIST® SCREWDRIVERS FOR SLOTTED HEAD SCREWS - MILLED BLADES - FLUO




Standards :


NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600


Description :

- Detect the tool thanks to its fluorescence, activated by a lamp or UV neon light. Detectable in black or dark environment up to 5 meters.
- Round shank for access in wells.
- Extra-long shank up to 150 mm for difficult and remote access.
- Silicon carbon blade: strong and resistant to flexion.
- Bi-material grip resists to impacts, abrasion, and chemicals.

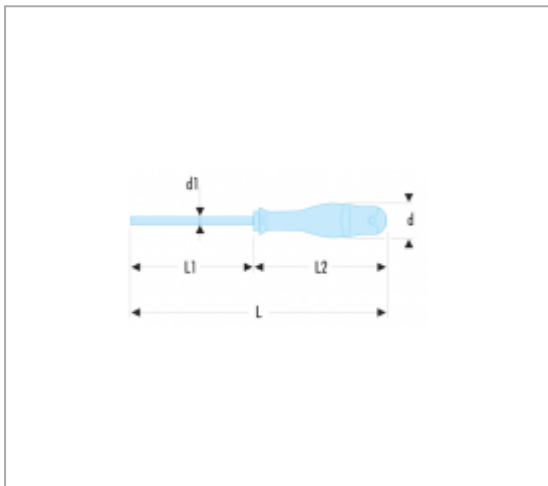

References :

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
AN3X75F	3,5	25	3,5 x 75	0,6	178	103	41
AN3X100F	3,0	25	3,0 x 100	0,5	203	103	33
AN2X75F	2,0	19	2,0 x 75	0,4	169	94	18
AN4X150F	4,0	30	4,0 x 150	0,8	259	109	52
AN4X35F	4,0	36	4,0 x 35	0,8	91	56	36
AN2.5X75F	2,5	19	2,5 x 75	0,4	169	94	21

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
AN3.5X75F	3,5	25	3,5 x 75	0,6	178	103	41
AN5.5X100F	5,5	30	5,5 x 100	1,0	209	109	82
AN3.5X100F	3,5	25	3,5 x 100	0,6	203	103	43
AN4X100F	4,0	30	4,0 x 100	0,8	209	109	47
AN5.5X150F	5,5	30	5,5 x 150	1,0	259	109	91
AN6.5X150F	6,5	36	6,5 x 150	1,2	270	120	140
AN6.5X35F	6,5	36	6,5 x 35	1,2	91	56	46