

K.HB 3/4" DRIVE METRIC 6-POINT SOCKETS




Standards :

NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.5


Description :

- OGV® profile: more powerful tightening, preserves fasteners.
- Secure attachment of plunger lock accessories
- Quick release button.
- Finish: satin chrome.

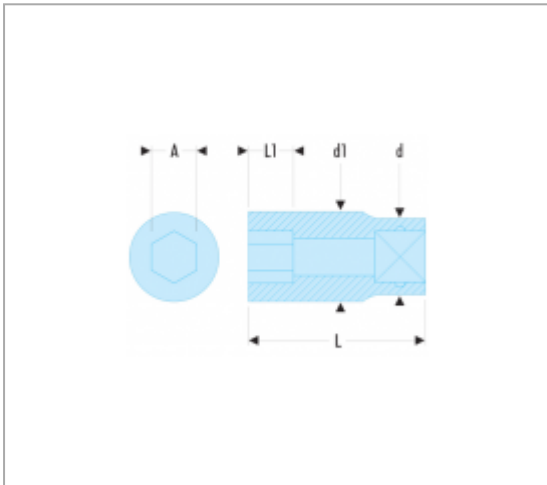

References :

| | A [MM] | D [MM] | D1 [MM] | L [MM] | L1 [MM] | HEX SIZE [MM] | COLOR | [G] |
|--------|--------|--------|---------|--------|---------|---------------|------------|-----|
| K.43HB | 43 | 40 | 60,7 | 66,9 | 27 | 6 | | 560 |
| K.19HB | 19 | 36 | 30,1 | 51,0 | 14 | 6 | Red 3020 | 207 |
| K.21HB | 21 | 36 | 32,0 | 51,0 | 14 | 6 | Black 9004 | 208 |
| K.22HB | 22 | 36 | 33,4 | 51,0 | 14 | 6 | | 221 |
| K.23HB | 23 | 36 | 36,0 | 52,5 | 14 | 6 | | 244 |
| K.24HB | 24 | 36 | 36,0 | 52,5 | 16 | 6 | Red 3020 | 237 |

|  | A [MM] | D [MM] | D1 [MM] | L [MM] | L1 [MM] | HEX SIZE [MM] | COLOR | [G] |
|---|--------|--------|---------|--------|---------|---------------|------------|-----|
| K.26HB | 26 | 36 | 38,9 | 52,5 | 16 | 6 | Black 9004 | 231 |
| K.27HB | 27 | 36 | 39,7 | 52,5 | 18 | 6 | Red 3020 | 232 |
| K.28HB | 28 | 36 | 41,0 | 52,5 | 18 | 6 | Black 9004 | 239 |
| K.29HB | 29 | 36 | 42,0 | 52,5 | 18 | 6 | Red 3020 | 245 |
| K.30HB | 30 | 36 | 43,2 | 59,0 | 20 | 6 | Black 9004 | 282 |
| K.32HB | 32 | 36 | 45,9 | 59,0 | 22 | 6 | Red 3020 | 301 |
| K.33HB | 33 | 36 | 48,1 | 59,0 | 22 | 6 | Black 9004 | 330 |
| K.34HB | 34 | 36 | 48,4 | 59,0 | 24 | 6 | Red 3020 | 322 |
| K.35HB | 35 | 36 | 50,1 | 59,0 | 24 | 6 | Black 9004 | 344 |
| K.36HB | 36 | 36 | 51,0 | 59,0 | 24 | 6 | Red 3020 | 347 |
| K.38HB | 38 | 40 | 54,3 | 66,9 | 27 | 6 | Black 9004 | 478 |
| K.40HB | 40 | 40 | 56,0 | 66,9 | 27 | 6 | | 493 |
| K.41HB | 41 | 40 | 57,3 | 66,9 | 27 | 6 | | 504 |
| K.42HB | 42 | 40 | 59,5 | 66,9 | 27 | 6 | | 552 |
| K.44HB | 44 | 40 | 61,9 | 66,9 | 28 | 6 | | 587 |
| K.46HB | 46 | 40 | 63,5 | 75,0 | 30 | 6 | | 641 |
| K.50HB | 50 | 40 | 68,5 | 75,0 | 33 | 6 | | 725 |
| K.54HB | 54 | 45 | 74,0 | 75,0 | 36 | 6 | | 880 |
| K.55HB | 55 | 45 | 74,7 | 75,0 | 36 | 6 | | 875 |