

NG.A - 1 1/2" DRIVE METRIC 6-POINT IMPACT SOCKETS




Standards :

NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33

Description :

- For your safety, use impact sockets and accessories with the appropriate rings and pins.

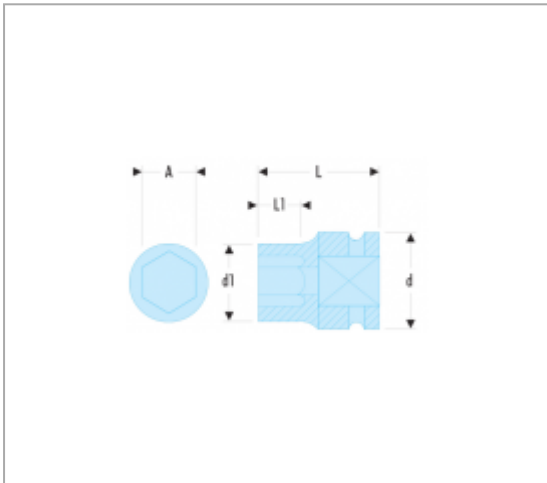

References :

	A [MM]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	CONTAINER	GA	[KG]
NG.55A	55	86	87	90	38	6	BA.74B	Box	GA.75B	2.5
NG.60A	60	86	94	92	38	6	BA.74B	Box	GA.75B	2.9
NG.65A	65	86	100	95	40	6	BA.74B	Box	GA.75B	3.2
NG.70A	70	86	106	100	43	6	BA.74B	Roll: N.38A-6B	GA.75B	3.8
NG.75A	75	86	112	103	45	6	BA.74B	Roll: N.38A-17A	GA.75B	3.9
NG.80A	80	86	119	110	51	6	BA.74B		GA.75B	4.6

	A [MM]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	CONTAIN	GA	[KG]
NG.85A	85	86	125	118	52	6	BA.74B		GA.75B	5.4
NG.90A	90	86	131	118	52	6	BA.74B		GA.75B	5.7
NG.95A	95	95	137	118	52	6	BA.74B		GA.75B	6.6
NG.100A	100	95	144	125	59	6	BA.74B		GA.75B	7.2
NG.105A	105	95	150	125	59	6	BA.74B		GA.75B	7.8
NG.110A	110	95	156	125	59	6	BA.74B		GA.75B	8.6
NG.115A	115	95	162	135	67	6	BA.74B		GA.75B	9.7
NG.120A	120	95	169	135	67	6	BA.74B		GA.75B	9.5