

NS.A - 1/2" DRIVE METRIC 6-POINT IMPACT SOCKETS




Standards :


NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33

Description :

- For your safety, use impact sockets and accessories with the appropriate rings and pins.

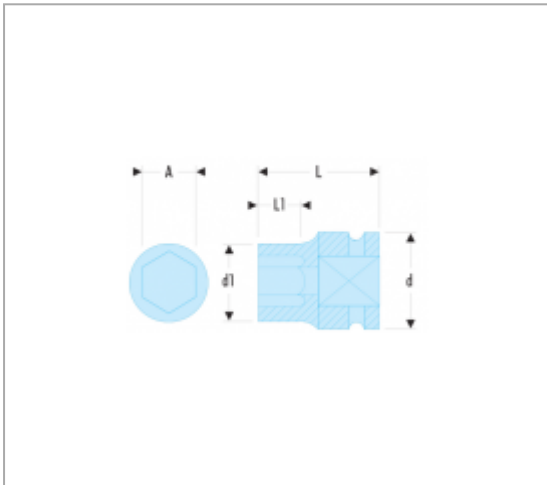

References :

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	CONTAINER	GA	[G]
NS.8A	8	24	15	9	38	21	6	BA.20B	Tray: PL.682	GA.20B	70
NS.9A	9	24	16	12	38	21	6	BA.20B	Plateau : PL.680	GA.20B	70
NS.10A	10	24	16	12	38	21	6	BA.20B	Tray: PL.608A	GA.20B	75
NS.11A	11	24	18	12	38	21	6	BA.20B	Tray: PL.608A	GA.20B	75
NS.12A	12	24	20	12	38	21	6	BA.20B	Tray: PL.317A	GA.20B	75

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	CONTAINER	GA	[G]
NS.13A	13	24	21	12	38	21	6	BA.20B	Tray: PL.318	GA.20B	75
NS.14A	14	24	22	12	38	21	6	BA.20B	Tray: PL.600	GA.20B	85
NS.15A	15	24	24	12	38	21	6	BA.20B	Tray: PL.625	GA.20B	105
NS.16A	16	24	24	12	38	21	6	BA.20B	Tray: PL.359	GA.20B	105
NS.17A	17	25	26	13	38	21	6	BA.20B	Tray: PL.304	GA.20B	110
NS.18A	18	25	28	13	38	21	6	BA.20B	Tray: PL.319A	GA.20B	110
NS.19A	19	25	28	14	38	21	6	BA.20B	Tray: PL.320	GA.20B	110
NS.20A	20	25	30	15	38	21	6	BA.20B	Tray: PL.365	GA.20B	110
NS.21A	21	25	30	15	38	21	6	BA.20B		GA.20B	150
NS.22A	22	30	32	16	38	21	6	BA.25B		GA.25B	150
NS.23A	23	30	34		38	21	6	BA.25B		GA.25B	150
NS.24A	24	30	34	20	38	21	6	BA.25B		GA.25B	160
NS.26A	26	30	36	24	42	23	6	BA.25B		GA.25B	180
NS.27A	27	30	38	24	43	23	6	BA.25B		GA.25B	200
NS.28A	28	30	40	24	44	25	6	BA.25B		GA.25B	260
NS.29A	29	30	40	24	44	25	6	BA.25B		GA.25B	260
NS.30A	30	30	42	24	44	25	6	BA.25B		GA.25B	270
NS.32A	32	30	44	-	44	25	6	BA.25B		GA.25B	280