

R.FLUO 1/4" DRIVE METRIC 6-POINT SOCKETS - FLUO




Standards :

NF ISO 2725-1, NF ISO 1711-1, ISO 2725-1, ISO 1711-1, DIN 3124, ASME B107.13

Description :

- Detect the tool thanks to its fluorescence, activated by a lamp or UV neon light. Detectable in black or dark environment up to 5 meters.
- OGV® profile: more powerful tightening, preserves fasteners.
- Finish: bright chrome.
- Available as sets on metal rack (Ref R.40E).

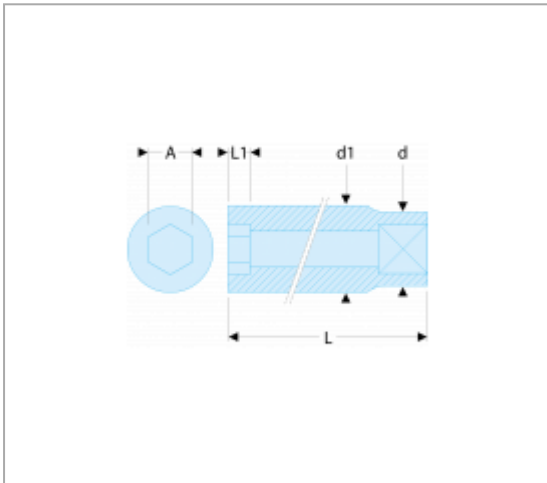

References :

	A [MM]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	6-POINT [NO]	[G]
R.10FLUO	10,0	14,7	14,7	22	7,8	6	20
R.11FLUO	11,0	15,8	15,8	22	9,0	6	20
R.12FLUO	12,0	17,0	17,0	22	9,50	6	25
R.13FLUO	13,0	17,7	17,7	22	10,00	6	25
R.14FLUO	14,0	18,7	18,7	22	10,00	6	30
R.3.2FLUO	3,2	11,2	5,9	22	2,4	6	10
R.4FLUO	4,0	11,2	6,9	22	2,6	6	10
R.5.5FLUO	5,5	11,2	8,8	22	4,8	6	10

	A [MM]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	6-POINT [NO]	[G]
R.5FLUO	5,0	11,2	8,2	22	4,8	6	10
R.6FLUO	6,0	11,2	9,4	22	5,6	6	10
R.7FLUO	7,0	11,0	11,0	22	6,0	6	10
R.8FLUO	8,0	12,0	12,0	22	6,5	6	10
R.9FLUO	9,0	13,2	13,2	22	6,5	6	15