


U.23K-U.53K - TAPPED BEAMS




Description :

- Tapped beams are used in mechanical pulling with separators, spherical or threaded tips.
- Spread: \varnothing 25 to 400 mm.

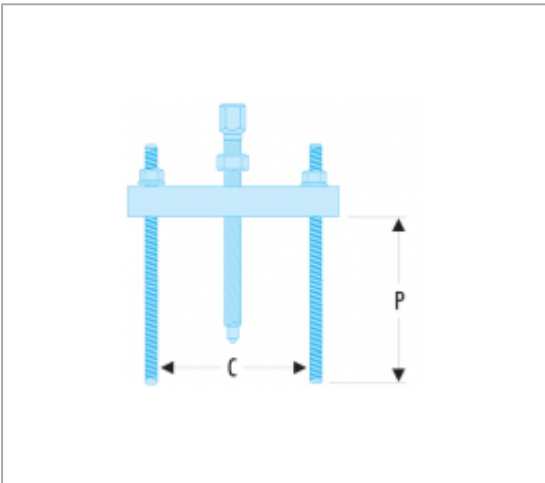

References :

	C MINI - MAXI [MM]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	L2 [MM]	L3 [MM]	P [MM]	P MAXI [MM]	HEX SIZE [MM]	TIE-RODS	TO [T]
U.23K1A	25 - 95	M10	8	110	155	20	20	100	100	8	U.23K1A- 03	1
U.53K1	40 - 110	M16	11	135	215	25	25	180	180	11	U.53R1L	3
U.53K2	70 - 200	M16	11	220	280	30	30	240	240	11	U.53R2L	3
U.53K3	75 - 280	M27	21	320	340	45	35	300	300	16	U.53R3L	4
U.53K4	145 - 400	M33	25	450	420	50	50	350	350	21	U.53R4LA	5