


U.306 - OUTSIDE PULLERS



Description :

- Versatile: takes 2 or 3 legs. Converts into inside puller with the legs U.306G2 + screw U.306-4 or legs U.306G20 + screw U.306-2.
- Comfort: self-gripping legs by return spring. The puller stays in rolling position even when not in tension.
- Safety: legs locked in position on the bearing using a knob. No risk for the puller to escape from the bearing.
- Shear pin: the pin shears if torque limit is exceeded. Supplied with 2 spare pins.
- Set of 3 spare pins. Refer to spares table according to puller power.
- Adaptable puller accessories: slide hammer U.306M (direct attachment) and beam U.40 (attached using ring and nut U.306A1 to be ordered separately).
- The U.306-260 puller is supplied with the U.306-3 screw fitted with its extension.

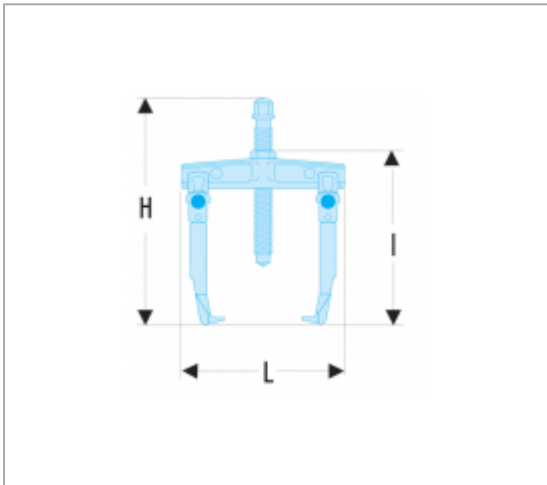

References :

	C MINI - MAXI [MM]	H [MM]	WIDTH L [MM]	L [MM]	P MAXI [MM]	HEX SIZE [MM]	LEGS	TON [T]	SCREW SIZE	SCREW SIZE [MM]	T [KN]
U.306-180	50 - 170	320	185	135	200	18	U.306G10	4	U.306- 2	18	40
U.306-260	20 - 260	385	350	145	250	18	U.306G15	4	U.306- 3	18	40
U.306A140	7 - 140	262	225	130	147	18	U.306G1	3	U.306- 4	18	30