


## U.53T - SEPARATORS




### Description :

- Separators spread  $\varnothing$  5 to 250 mm.
- Fit behind races where ordinary puller claws will not reach.
- They can be used with beams assisted by screws or jacks.

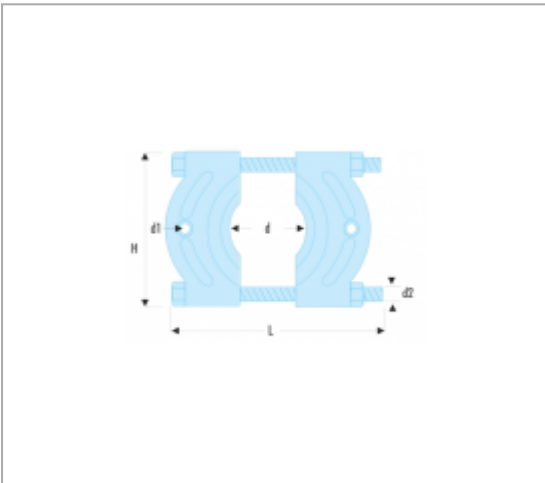

## References :

	D MINI - MAXI [MM]	D1 [MM]	D2 [MM]	H [MM]	L [MM]	FOR	FOR USE ON	SCREW SIZE	[G]	[KG]
U.53T1	5 - 60	M10	M12	91	140	U.53K1	-	U.53T1- 02	600	
U.53T2	15 - 110	M16	M16	153	215	U.53K2 - U.53S2A	U.53S2A	U.53T2- 02		2.1
U.53T3	15 - 150	M20	M20	204	290	U.53K3	-	U.53T3- 02		4.6
U.53T4	20 - 180	M22	M22	289	360	U.53K4 - U.53S4A	U.53S4A	U.53T4- 02		8.2
U.53T5	25 - 250	M22	M22	316	430	U.53K4 - U.53S4A	U.53S4A	U.53T5- 02		11.2