

## 54A.SLS - METRIC "HEAVY-DUTY" OFFSET-RING WRENCHES




### Standards :

NF ISO 691, ISO 691, DIN ISO 691


### Description :

- Tool equipped with a FACOM SLS attachment solution, preventing any risk of accidental falls.
- The crimped "rotating" cable solution, selected and tested by FACOM, maintains user ergonomics.
- "Heavy-duty" offset-ring wrenches: wrenches for tight (unlocking, thanks to high strength of the polygonal head and long adaptable handle (to be ordered separately).
- Ring offset to clear fingers or obstacles. Ideal for series of nuts.
- Handle to use: - 54.M1BSLS for the dimensions 24 and 30 mm; - 54.M2BSLS for the dimensions 32 to 41 mm; - 54.M3BSLS for the dimensions 46 mm;
- Metric sizes: 24 to 46 mm.
- Presentation: satin chrome finish.

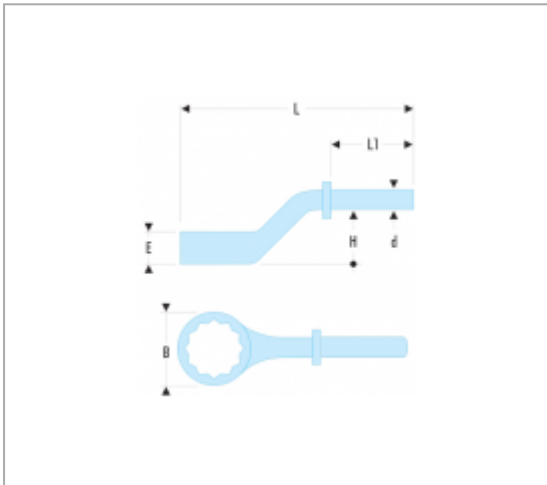

### References :

	A [MM]	B [MM]	B X C [MM]	D [MM]	E [MM]	EX L [MM]	H [MM]	L [MM]	L1 [MM]	L2 [MM]	L3 [MM]	[MM]
54A.24SLS	24	38,0	38 x 17,0	18,5	17,0	29,5 x 180	29,5	180	85	460	555	4
54A.30SLS	30	48,0	48 x 18,0	18,5	18,0	33,5 x 200	33,5	200	95	460	565	5
54A.32SLS	32	49,0	49 x 18,0	21,5	18,0	34,0 x 235	34,0	235	116	610	730	7
54A.36SLS	36	54,0	54 x 20,0	21,5	20,0	35,5 x 245	35,5	245	120	610	735	8

	A [MM]	B [MM]	B X C [MM]	D [MM]	E [MM]	E X L [MM]	H [MM]	L [MM]	L1 [MM]	L2 [MM]	L3 [MM]	[
54A.41SLS	41	62,0	62 x 22,0	21,5	22,0	39,5 x 265	39,5	265	127	610	748	1
54A.46SLS	46	69,0	69 x 23,0	24,5	23,0	40,0 x 280	40,0	280	129	760	910	1