

## S.RC - 1/2" DRIVE LOCKING EXTENSIONS




### Standards :

NF ISO 3316, ISO 3316, DIN 3123, ASME B107.10

### Description :

- Total safety as lock system prevents socket loss.
- Safety and instant release, by retracting knurled ring, for total user confidence.
- Positive locking for use with sockets with internal ball notch.
- Finish: bright chrome with phosphate-hardened ring.

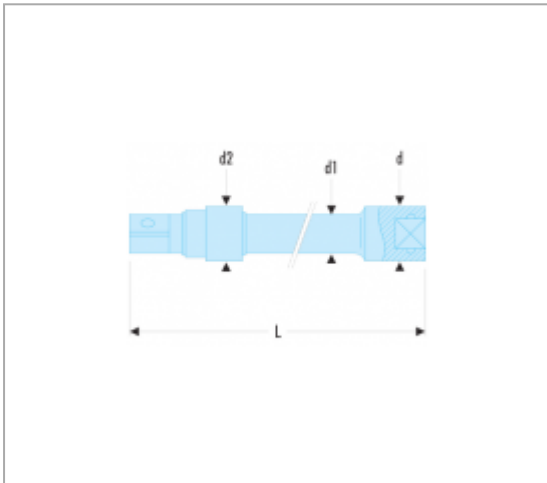

### References :

	D [MM]	D1 [MM]	D2 [MM]	E [MM]	L [MM]	SQUARE ["]	[G]
S.217RC	23	16,5	23	16,5	500	1/2	860
S.210RC	23	16,5	23	16,5	130	1/2	250
S.215RC	23	16,5	23	16,5	250	1/2	450