


## 76.SLS - FORGED METRIC-SIZE AND INCH-SIZE 12 X 6 POINT ANGLED OPEN-SOCKET WRENCHES - SLS



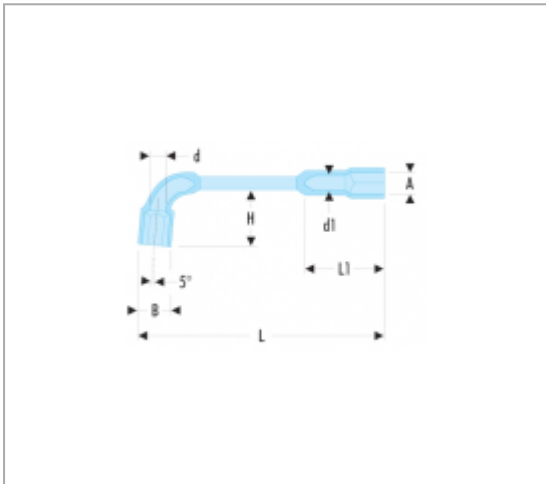

### Description :

- Tool fitted with a FACOM SLS attachment solution, preventing any risk of accidental falls.
- The "turning" crimped cable solution, chosen and tested by FACOM, preserves the ergonomics of use of the tool.
- Open-socket wrenches for powerful (un)tightening.
- 12-point short head for 30° increment and 6-point long-reach head.
- Short head open socket for passing threaded rods.
- Metric dimensions: 8 to 32 mm.
- Satin chrome finish.



### References :

	A [MM]	B [MM]	D [MM]	D1 [MM]	H [MM]	L [MM]	L1 [MM]	[G]
76.8SLS	8	12,5	7	6	19	114	25	80
76.9SLS	9	13,5	7	6	20	122	26	100
76.10SLS	10	15,0	8	7	24	129	28	110
76.11SLS	11	16,5	8	7	25	136	30	130
76.12SLS	12	18,0	9	8	28	144	36	165
76.13SLS	13	19,5	9	8	30	152	38	190
76.14SLS	14	21,0	10,5	9	32	160	40	215

	A [MM]	B [MM]	D [MM]	D1 [MM]	H [MM]	L [MM]	L1 [MM]	[G]
76.15SLS	15	22,5	10,5	10	34	169	42	230
76.16SLS	16	24,0	13	12	37	178	46	295
76.17SLS	17	25,5	13	12	39	187	48	325
76.18SLS	18	26,5	13	12	40	195	50	350
76.19SLS	19	28,5	15	12	41	204	51	450
76.21SLS	21	30,5	15	14	46	221	55	510
76.22SLS	22	32,0	15	14	48	230	57	600
76.24SLS	24	34,5	18	16	54	250	67	795
76.27SLS	27	38,0	22	19	58	280	73	970
76.30SLS	30	42,0	24	21	64	310	83	1300
76.32SLS	32	44,5	24	22,6	74	330	88	1500