

248 - ONE-PIECE DRIFT PUNCHES




Standards :


NF E 71-211

Description :

- Octagon-shaped, high-strength steel tip, hardened to 53-55 HRc.
- Zinc-plated finish.

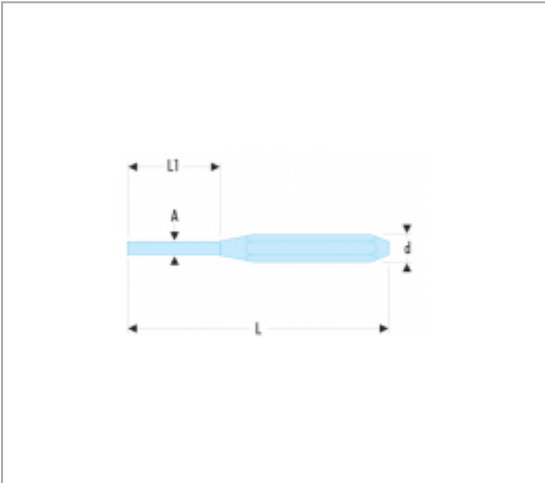

References :

	A [MM]	D [MM]	L [MM]	L1 [MM]	BITS	[G]
248.10	9,9	12	150	50		120
248.2	1,9	8	150	30		45
248.3	2,9	8	150	40		50
248.4	3,9	10	150	50	Slotted head: 1,8 - 2,5 ; PH: 0,9 - 1,3 - 1,5 - 2 mm ; PZ: 0 - 1 - 2 mm	55
248.5	4,9	10	150	50	Slotted head: 4 - 4,5 - 5,5 ; PH: 1,5 - 2,5 - 3 mm ; PZ: 0 - 1 mm	65

	A [MM]	D [MM]	L [MM]	L1 [MM]	BITS	[G]
248.6	5,9	10	150	50	Slotted head: 4,5 - 6,5 - 8 ; 6-point: 3 - 4 - 5 mm ; PZ: 1 - 2 - 3 mm	70
248.8	7,9	12	150	50	Slotted head: 4,5 - 6,5 - 8 ; 6-point: 3 - 4 - 5 mm ; PZ: 1 - 2 - 3 mm	100