

440.SLS - INCH COMBINATION WRENCHES




Standards :

ASME B107.100, SAE AS954G

Description :

- Tool equipped with a FACOM SLS attachment solution, preventing any risk of accidental falls.
- The crimped "sliding" cable solution, selected and tested by FACOM, maintains user ergonomics (8 - 30 mm wrenches).
- Standard wrench for all current applications.
- High mechanical strength combined with compact size meeting aeronautical standards.
- Ring head: - Ring open end (size E) designed for better access to series or embedded screws. - OGV® profile with 12-point ring for powerful tightening while protecting the nut. - Ring head angled at 15°.
- Open end head: - Open end angled at 15°.
- Open end head-handle geometry optimised for increased access.
- Dimensions in inches: from 1/4" to 1"5/16.
- Presentation: satin chrome finish.

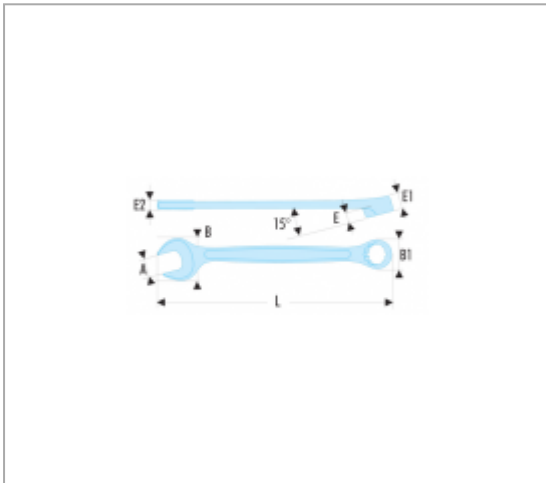

References :

	A ["]	B [MM]	B1 [MM]	E [MM]	E1 [MM]	E2 [MM]	L [MM]	[G]
440.1/4SLS	1/4	14,1	10,0	3,1	6,0	3,8	115	45
440.5/16SLS	5/16	19,2	12,8	3,5	6,7	4,7	133	55
440.11/32SLS	11/32	21,2	14,2	3,9	7,1	4,7	138	60
440.3/8SLS	3/8	23,0	15,0	4,2	7,6	5,2	145	70
440.7/16SLS	7/16	24,5	16,9	4,6	8,1	5,5	155	75
440.1/2SLS	1/2	28,7	19,3	4,8	8,6	6,1	170	95
440.9/16SLS	9/16	31,0	21,1	5,7	9,5	6,4	180	100
440.5/8SLS	5/8	35,6	23,9	6,4	10,5	7,3	195	140

	A ["]	B [MM]	B1 [MM]	E [MM]	E1 [MM]	E2 [MM]	L [MM]	[G]
440.11/16SLS	11/16	37,0	25,3	6,5	10,9	7,6	202	155
440.3/4SLS	3/4	41,2	27,8	7,2	11,9	8,3	216	195
440.13/16SLS	13/16	43,1	29,5	6,3	12,3	8,6	224	210
440.7/8SLS	7/8	46,9	32,3	8,3	13,3	9,0	248	255
440.15/16SLS	15/16	51,0	35,0	8,9	14,2	9,7	267	315
440.1PSLS	1	53,0	36,4	9,4	14,7	9,9	274	340
440.1P1/16SLS	1'1/16	58,0	39,2	8,9	15,6	10,4	295	400
440.1P1/8SLS	1'1/8	60,7	40,6	10,6	16,1	10,7	305	440
440.1P1/4SLS	1'1/4	68,0	46,1	11,5	18,0	12,5	355	665
440.1P5/16SLS	1'5/16	69,8	47,0	11,8	18,5	12,8	380	740