


440.SR - NON SPARKING INCH COMBINATION WRENCHES



Description :

- Special non sparking and anti-magnetic Copper-Beryllium alloy.

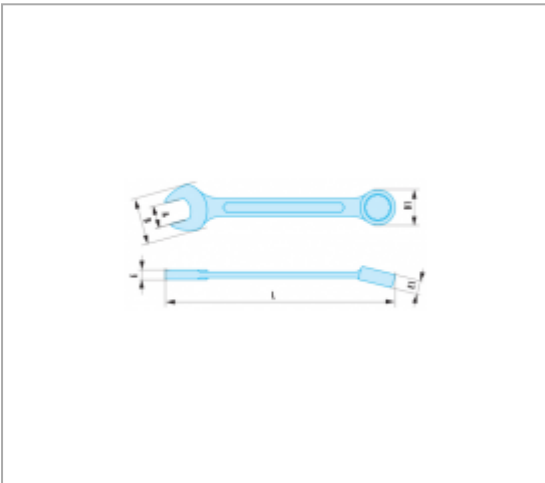

References :

	A ["]	B [MM]	B1 [MM]	E [MM]	E1 [MM]	L [MM]	SCREW SIZE [MM]	[G]
440.1/4SR	1/4"	14,0	11,6	4,4	6,0	105		20
440.5/16SR	5/16"	17,5	14,5	5,0	7,0	120		40
440.3/8SR	3/8"	22,0	18,0	5,4	8,0	135		55
440.7/16SR	7/16"	26,5	21,0	6,0	9,0	150		55
440.1/2SR	1/2"	30,0	23,0	6,6	10,0	175		75
440.9/16SR	9/16"	30,0	23,0	6,6	10,0	175		120
440.19/32SR	19/32"	35,0	27,0	7,6	11,0	195		125
440.5/8SR	5/8"	35,0	27,0	7,6	11,0	195		155

	A ["]	B [MM]	B1 [MM]	E [MM]	E1 [MM]	L [MM]	SCREW SIZE [MM]	[G]
440.11/16SR	11/16"	35,0	27,0	7,6	11,0	195		155
440.3/4SR	3/4"	39,0	31,0	8,0	12,0	215	1	210
440.13/16SR	13/16"	45,0	34,0	9,5	13,5	230	2	225
440.7/8SR	7/8"	46,0	36,0	9,4	14,0	245	3	250
440.15/16SR	15/16"	49,0	38,0	10,0	15,2	265	4	260
440.1PSR	1"	56,0	42,0	11,4	17,0	290	5	260
440.1P1/16SR	1-1/16"	56,0	42,0	11,4	17,0	290		420
440.1P1/8SR	1-1/8"	61,0	49,0	13,0	20,0	320		560
440.1P3/16SR	1-3/16"	61,0	49,0	13,0	20,0	320		560
440.1P1/4SR	1-1/4"	65,0	52,0	14,0	21,0	340		670
440.1P5/16SR	1-5/16"	72,0	52,0	15,0	21,0	360	1	850
440.1P3/8SR	1-3/8"	72,0	55,0	15,0	21,0	360	2	890