

440F - INCH COMBINATION WRENCHES - FLUO




Standards :

ASME B107.100, SAE AS954G

Description :

- Detect the tool thanks to its fluorescence, activated by a lamp or UV neon light. Detectable in black or dark environment up to 5 meters.
- Standard wrench for all current applications.
- High mechanical strength combined with compact size meeting aeronautical standards.
- Ring head: - Ring open end (size E) designed for better access to series or embedded screws. - OGV® profile with 12-point ring for powerful tightening while protecting the nut. H suffix = 6-point ring. - Ring head angled at 15°.
- Open end head: - Open end angled at 15°.
- Open end head-handle geometry optimised for increased access.
- Dimensions in inches: from 1/4" to 1".
- Presentation: satin chrome finish.

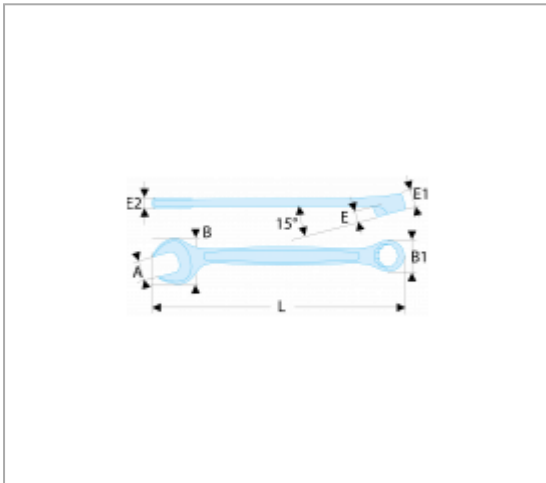

References :

	A ["]	B [MM]	B1 [MM]	E [MM]	E1 [MM]	E2 [MM]	L [MM]	[G]
440.1/2F	1/2	28,7	19,3	4,8	8,6	6,1	170	70
440.1/4F	1/4	14,1	10,0	3,1	6,0	3,8	115	20
440.11/16F	11/16	37,0	25,3	6,5	10,9	7,6	202	130
440.11/32F	11/32	21,2	14,2	3,9	7,1	4,7	138	35
440.13/16F	13/16	43,1	29,5	6,3	12,3	8,6	224	185
440.15/16F	15/16	51,0	35,0	8,9	14,2	9,7	267	290
440.1PF	1	53,0	36,4	9,4	14,7	9,9	274	315
440.3/4F	3/4	41,2	27,8	7,2	11,9	8,3	216	170

	A ["]	B [MM]	B1 [MM]	E [MM]	E1 [MM]	E2 [MM]	L [MM]	[G]
440.3/8F	3/8	23,0	15,0	4,2	7,6	5,2	145	45
440.5/16F	5/16	19,2	12,8	3,5	6,7	4,7	133	30
440.5/8F	5/8	35,6	23,9	6,4	10,5	7,3	195	115
440.7/16F	7/16	24,5	16,9	4,6	8,1	5,5	155	50
440.7/8F	7/8	46,9	32,3	8,3	13,3	9,0	248	230
440.9/16F	9/16	31,0	21,1	5,7	9,5	6,4	180	85