

44F - INCH OPEN END WRENCHES - FLUO




Standards :

ASME B107.100


Description :

- Detect the tool thanks to its fluorescence, activated by a lamp or UV neon light. Detectable in black or dark environment up to 5 meters.
- Open end wrenches = the open ends are slimmer than a standard combination wrench for better thickness accessibility. Examples: brake calipers, hydraulic hose locknuts.
- Heads hinged at 15°.
- Dimensions in inches: from 1/4" to 11/16".
- Presentation: satin chrome finish.

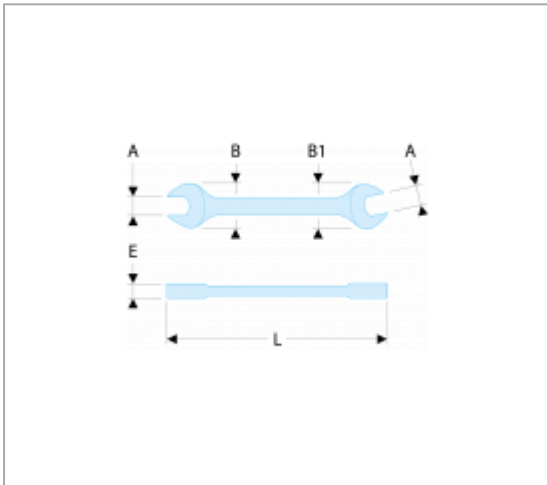

References :

| | A ["] | B X B1 [MM] | E [MM] | L [MM] | HEX SIZE [MM] | [G] |
|-----------------|-------------|-------------|--------|--------|---------------|-----|
| 44.1/4X5/16F | 1/4x5/16 | 15,0 x 17,5 | 3,5 | 120 | 15,0 x 17,5 | 20 |
| 44.11/32X13/32F | 11/32X13/32 | 19,0 x 23,0 | 4,2 | 143 | 19,0 x 23,0 | 40 |
| 44.3/8X7/16F | 3/8X7/16 | 23,0 x 25,0 | 4,7 | 152 | 23,0 x 25,0 | 50 |
| 44.1/2X9/16F | 1/2X9/16 | 29,0 x 33,5 | 5,5 | 177 | 29,0 x 33,5 | 80 |
| 44.5/8X11/16F | 5/8X11/16 | 37,0 x 42,0 | 6,8 | 210 | 37,0 x 42,0 | 145 |

|  | A ["] | B X B1 [MM] | E [MM] | L [MM] | HEX SIZE [MM] | [G] |
|---|---------------|-------------|--------|--------|---------------|-----|
| 44.3/4X13/16F | 3/4X13/16 | 43,0 x 48,5 | 7,5 | 240 | 43,0 x 48,5 | 200 |
| 44.1PX1P1/16F | 1'X1'1/16 | 56,0 x 61,6 | 8,8 | 282 | 56,0 x 61,6 | 360 |
| 44.1P1/8X1P1/4F | 1'1/8X1'1/4 | 63,0 x 70,0 | 9,8 | 318 | 63,0 x 70,0 | 515 |
| 44.1P3/16X1P5/16F | 1'3/16X1'5/16 | 63,0 x 70,0 | 9,8 | 318 | 63,0 x 70,0 | 515 |
| 44.1P3/8X1P1/2F | 1'3/8X1'1/2 | 78,0 x 87,0 | 12 | 381 | 78,0 x 87,0 | 945 |
| 44.7/8X15/16F | 7/8X15/16 | 47,5 x 52,0 | 8,3 | 251 | 47,5 x 52,0 | 260 |