

AN-ANF.SLS - PROTWIST® SCREWDRIVERS FOR SLOTTED HEAD SCREWS - MILLED BLADES




Standards :


NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600


Description :

- Tool equipped with a FACOM SLS attachment solution, preventing any risk of accidental falls.
- The crimped "rotating" cable solution, selected and tested by FACOM, maintains user ergonomics.
- Silicon carbon blade: strong and resistant to flexion.
- Bi-material grip resists to impacts, abrasion, and chemicals.
- Finish: black tipped mat chromed blade."

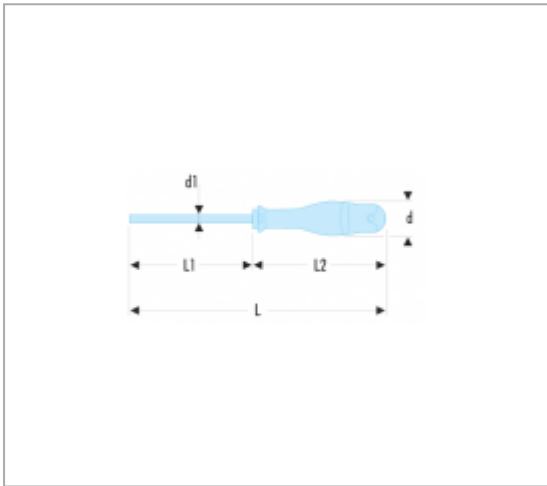

References :

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
AN2X75SLS	2,0	19	2,0 x 75	0,4	169	94	60
AN2.5X75SLS	2,5	19	2,5 x 75	0,4	169	94	60
AN3X100SLS	3,0	25	3,0 x 100	0,5	203	103	75
AN3.5X100SLS	3,5	25	3,5 x 100	0,6	203	103	85
AN4X100SLS	4,0	30	4,0 x 100	0,8	209	109	90
AN4X150SLS	4,0	30	4,0 x 150	0,8	259	109	95

	A [MM]	D [MM]	D1 X L1 [MM]	E [MM]	L [MM]	L2 [MM]	[G]
AN5.5X150SLS	5,5	30	5,5 x 150	1,0	259	109	130
AN6.5X150SLS	6,5	36	6,5 x 150	1,2	270	120	170
ANF8X150SLS	8,0	40	7,0 x 150	1,2	275	125	190
ANF10X200SLS	10,0	40	9,0 x 200	1,6	325	125	255