

J.LAF - 3/8" INCH 12-POINT SOCKETS - FLUO




Standards :

ASME B107.1


Description :

- Detect the tool thanks to its fluorescence, activated by a lamp or UV neon light. Detectable in black or dark environment up to 5 meters.
- OGV® profile: more powerful tightening, preserves fasteners.
- Long-reach sockets for long recess or thread access.
- Finish: bright chrome.

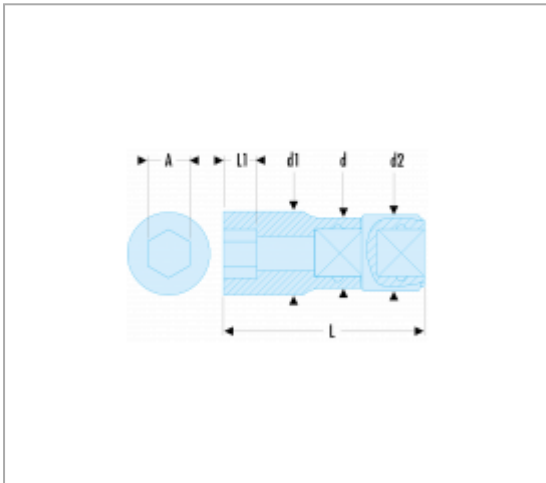

References :

	A ["]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[G]
J.1/4LAF	1/4	17,5	10,6	44,7	4,0	12	36
J.5/16LAF	5/16	17,5	12,4	44,7	4,3	12	36
J.3/8LAF	3/8	17,5	14,3	44,7	4,7	12	41
J.7/16LAF	7/16	17,5	16,2	44,7	6,2	12	45
J.1/2LAF	1/2	18,2	18,2	44,7	7,4	12	50
J.9/16LAF	9/16	20,5	20,5	48,0	9,0	12	72
J.5/8LAF	5/8	22,3	22,3	63,8	10,2	12	104
J.11/16LAF	11/16	23,8	23,8	63,8	10,2	12	113

	A ["]	D [MM]	D1 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	[G]
J.3/4LAF	3/4	25,3	25,3	63,8	11,8	12	127
J.13/16LAF	13/16	27,0	27,0	63,8	12,3	12	140
J.7/8LAF	7/8	30,2	30,2	63,8	12,7	12	181