


LONG-REACH LEG OUTSIDE PULLER




Description :

- Safety: legs locked in position on the bearing using the central nut. No risk for the puller to escape from the bearing.
- Shear pin: the pin shears if torque limit is exceeded. Supplied with 2 spare pins.
- Set of 3 spare pins. U.306-24J3.
- Fitted with the anti-rotation bush U.20-12. The button protects the screw when a bar is used to block puller rotation.
- Adaptable puller accessory: slide hammer U.2.

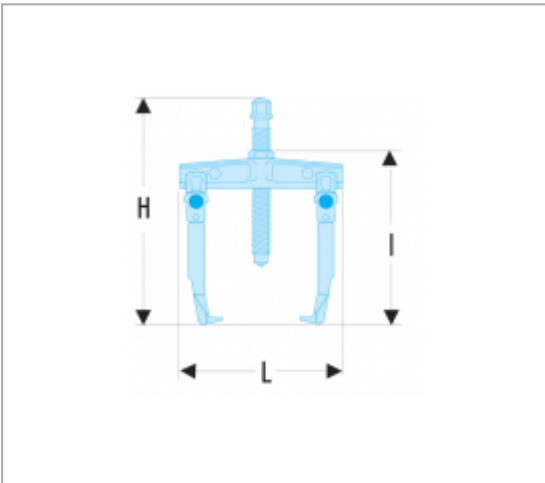

References :

	C MINI - MAXI [MM]	H [MM]	WIDTH L [MM]	L [MM]	P MAXI [MM]	HEX SIZE [MM]	LEGS	TON [T]	SCREW SIZE	SCREW SIZE [MM]	T [KN]	[KG]
U.20B	25 - 260	370	325	125	220	24	U.20BSE4	7	U.20- B1S	24	70	4.3