

NK.A - 3/4" DRIVE INCH 6-POINT IMPACT SOCKETS




Standards :


ASME B107.2


Description :

- For your safety, use impact sockets and accessories with the appropriate rings and pins.

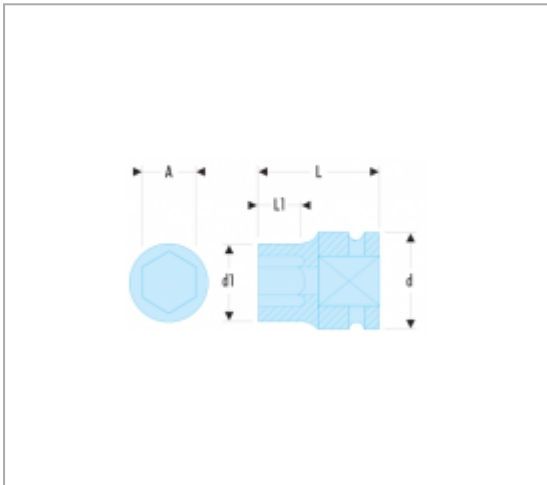

References :

	A ["]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	GA	[G]
NK.3/4A	3/4	38	29,5	14	50	14	6	BA.30B	GA.31B	315
NK.13/16A	13/16	38	32,0	15	50	14	6	BA.30B	GA.31B	330
NK.7/8A	7/8	38	34,0	16	50	14	6	BA.30B	GA.31B	345
NK.15/16A	15/16	38	36,0	17	50	17	6	BA.30B	GA.31B	350
NK.1PA	1"	44	41	18	50	18	6	BA.38A	GA.37A	480
NK.1P/16A	1' 1/16	44	43	23	54	23	6	BA.30B	GA.31B	480
NK.1P1/8A	1' 1/8	44	44	23	54	23	6	BA.38A	GA.37A	520

	A ["]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	GA	[G]
NK.1P1/4A	1' 1/4	44	49	23	56	23	6	BA.38A	GA.37A	620
NK.1P5/16A	1' 5/16	44	53	23	56	23	6	BA.38A	GA.37A	680
NK.1P7/16A	1' 7/16"	44	55	24	56	24	6	BA.38A	GA.37A	515
NK.1P1/2A	1' 1/2	44	57	26	58	26	6	BA.38A	GA.37A	890
NK.1P5/8A	1' 5/8	44	60	28	58	28	6	BA.38A	GA.37A	890