

## NM.LA - 1" DRIVE LONG-REACH METRIC 6-POINT IMPACT SOCKETS




### Standards :


NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33


### Description :

- For your safety, use impact sockets and accessories with the appropriate rings and pins.

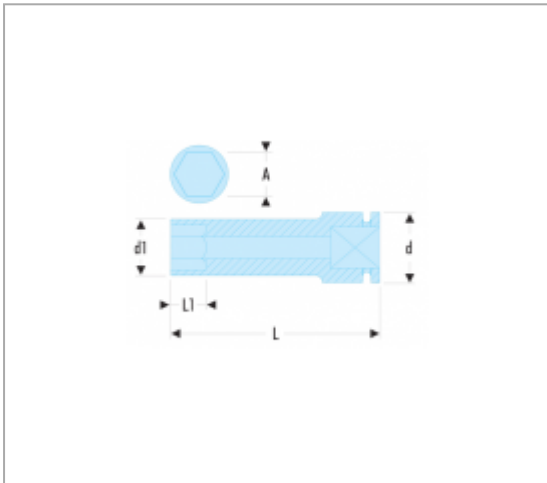

### References :

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	GA	[KG]
NM.22LA	22	54	40	21	100	17	6	BA.45B	GA.45B	1,0
NM.24LA	24	54	42	21	100	18	6	BA.45B	GA.45B	1,0
NM.27LA	27	54	46	24	100	18	6	BA.45B	GA.45B	1,1
NM.29LA	29	54	49	24	100	18	6	BA.45B	GA.45B	1,2
NM.30LA	30	54	50	24	100	20	6	BA.45B	GA.45B	1,2
NM.32LA	32	54	50	24	100	22	6	BA.45B	GA.45B	1,3
NM.33LA	33	54	52	24	100	22	6	BA.45B	GA.45B	1,3
NM.34LA	34	54	52	40	100	22	6	BA.45B	GA.45B	1,3

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	GA	[KG]
NM.35LA	35	54	54	60	100	24	6	BA.45B	GA.45B	1,3
NM.36LA	36	54	56	65	100	24	6	BA.45B	GA.45B	1,5
NM.38LA	38	54	58	65	100	26	6	BA.45B	GA.45B	1,5
NM.41LA	41	54	63	64	100	27	6	BA.45B	GA.45B	1,7
NM.42LA	42	54	64	64	100	27	6	BA.45B	GA.45B	1,7
NM.46LA	46	54	68	63	100	30	6	BA.45B	GA.45B	1,6
NM.50LA	50	54	73	62	100	33	6	BA.45B	GA.45B	1,9
NM.54LA	54	54	78	61	100	36	6	BA.45B	GA.45B	1,8
NM.55LA	55	54	80	60	100	36	6	BA.45B	GA.45B	1,9
NM.60LA	60	54	87	78	120	39	6	BA.45B	GA.45B	2,2
NM.65LA	65	54	93	80	120	45	6	BA.45B	GA.45B	2,2
NM.70LA	70	54	99	80	125	45	6	BA.45B	GA.45B	2,2