

NS.A - 1/2" DRIVE INCH 6-POINT IMPACT SOCKETS




Standards :

ASME B107.2


Description :

- For your safety, use impact sockets and accessories with the appropriate rings and pins.

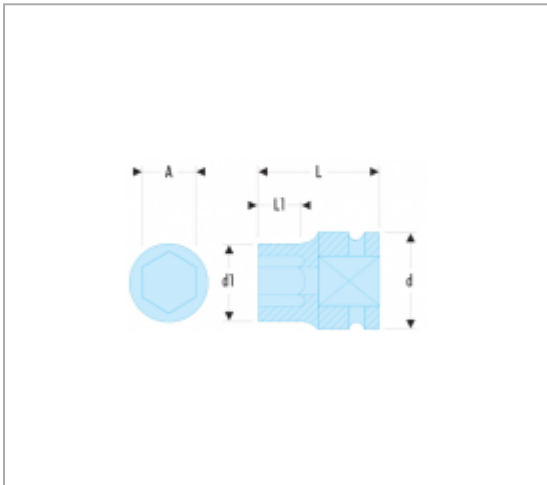

References :

	A ["]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	GA	[G]
NS.3/8A	3/8	24	16,0	12	38	17	6	BA.20B	GA.20B	75
NS.7/16A	7/16	24	18,0	12	38	17	6	BA.20B	GA.20B	75
NS.1/2A	1/2	24	21,0	12	38	17	6	BA.20B	GA.20B	75
NS.9/16A	9/16	24	22,0	12	38	17	6	BA.20B	GA.20B	80
NS.5/8A	5/8	24	24,0	12	38	17	6	BA.25B	GA.20B	105
NS.11/16A	11/16	25	25,0	13	38	21	6	BA.20B	GA.20B	110
NS.3/4A	3/4	25	28,0	14	38	21	6	BA.25B	GA.20B	120
NS.13/16A	13/16	25	30,0	15	38	21	6	BA.20B	GA.20B	105

	A ["]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	HEX SIZE [MM]	BA	GA	[G]
NS.7/8A	7/8	30	32,0	16	38	21	6	BA.25B	GA.25B	160
NS.15/16A	15/16	30	34,0	16	38	21	6	BA.25B	GA.25B	160
NS.1PA	1'	30	36,0	24	42	23	6	BA.25B	GA.25B	180
NS.1P1/16A	1' 1/16	30	38,0	24	43	23	6	BA.25B	GA.25B	205