

249 - STANDARD DRIFT PUNCHES - FLUO




Standards :


NF E 71-211, DIN 7250, ASME B107.410

Description :

- Fluorescent tool, detectable by ultraviolet light. Detectable in dark and dimly lit areas for 5 meters.
- Hexagonal shank, high-strength steel tip, hardened to 53-58 HRc.
- Zinc-plated finish.

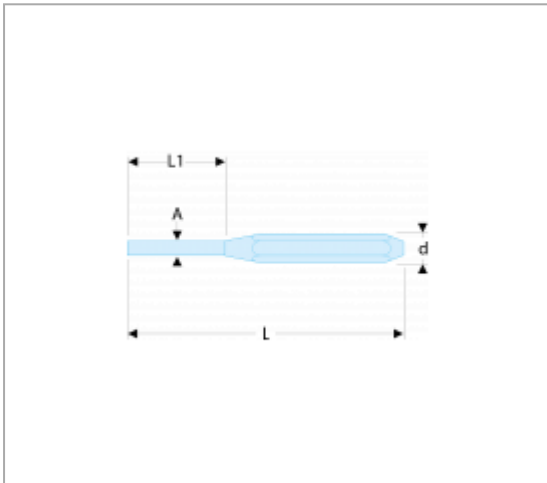

References :

	A [MM]	D [MM]	L [MM]	L1 [MM]	CAPACITY [LBF.IN]	[G]
249.2F	1,9	8	115	30	-	30
249.3F	2,9	8	125	40	0,035	35
249.4F	3,9	10	150	50	0,065	65
249.5F	4,9	10	165	50	0,075	75
249.6F	5,9	12	180	50	0,120	120
249.8F	7,9	12	200	50	0,160	160
249.10F	9,9	16	200	50	0,220	220