


75.SR - NON SPARKING METRIC ANGLED SOCKET WRENCHES




Description :

- Special non sparking and anti-magnetic Copper-Beryllium alloy.

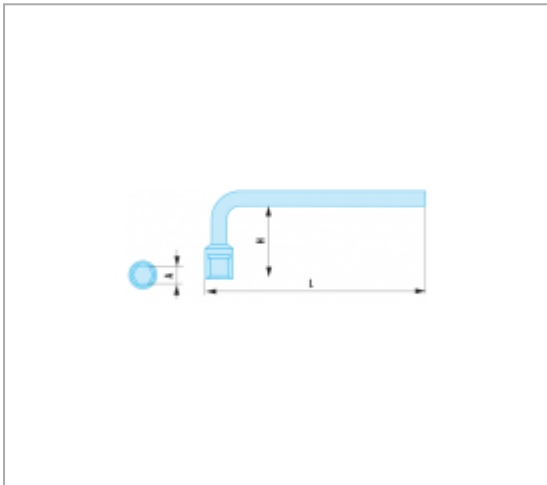

References :

	A [MM]	H [MM]	L [MM]	SCREW SIZE [MM]	[G]
75.10SR	10	37	168		200
75.12SR	12	42	216		220
75.13SR	13	45	240		250
75.14SR	14	45	245		300
75.15SR	15	48	250		350
75.16SR	16	48	255		500
75.17SR	17	51	260		550
75.18SR	18	53	265		550

	A [MM]	H [MM]	L [MM]	SCREW SIZE [MM]	[G]
75.19SR	19	55	270		550
75.21SR	21	57	275		750
75.22SR	22	59	278		750
75.23SR	23	60	282		800
75.24SR	24	63	286		850
75.27SR	27	69	294		900
75.30SR	30	75	302		1000
75.32SR	32	81	310	8	1100