

## J.F - 3/8" DRIVE HINGED INCH 12-POINT SOCKETS




### Standards :


ASME B107.1

### Description :

- OGV® profile: more powerful tightening, preserves fasteners.
- Compact solution used instead of universal joint.
- Finish: bright chrome.

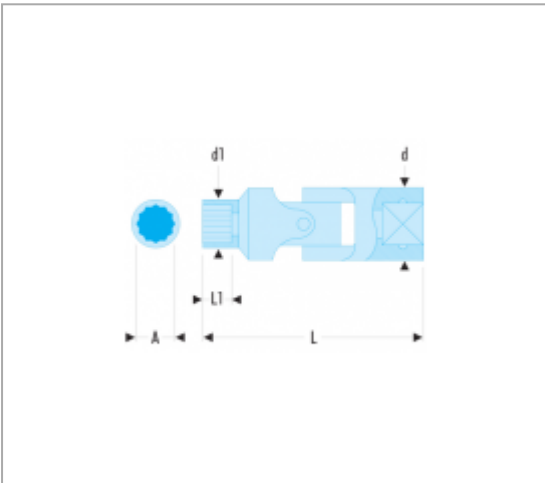

### References :

|  | A ["] | D [MM] | D1 [MM] | L [MM] | L1 [MM] | 12-POINT [MM] | [G] |
|---|-------|--------|---------|--------|---------|---------------|-----|
| J.1/2F  | 1/2   | 19     | 18,3    | 30     | 11,3    | 12            | 36  |
| J.11/16F  | 11/16 | 19     | 24,00   | 33     | 13,8    | 12            | 74  |
| J.3/4F  | 3/4   | 19     | 25,8    | 33     | 15,8    | 12            | 76  |
| J.3/8F  | 3/8   | 19     | 14,0    | 27     | 8,3     | 12            | 26  |
| J.5/8F  | 5/8   | 19     | 22,00   | 30     | 12,8    | 12            | 46  |
| J.7/16F   | 7/16  | 19     | 15,8    | 27     | 9,8     | 12            | 27  |
| J.9/16F   | 9/16  | 19     | 19,5    | 30     | 11,3    | 12            | 34  |