

NKD.A - 3/4" DRIVE METRIC 12-POINT IMPACT SOCKETS




Standards :

NF ISO 2725-2, NF ISO 1711-2, ISO 2725-2, ISO 1711-2, DIN 3129, ASME B107.33


Description :

- For your safety, use impact sockets and accessories with the appropriate rings and pins.

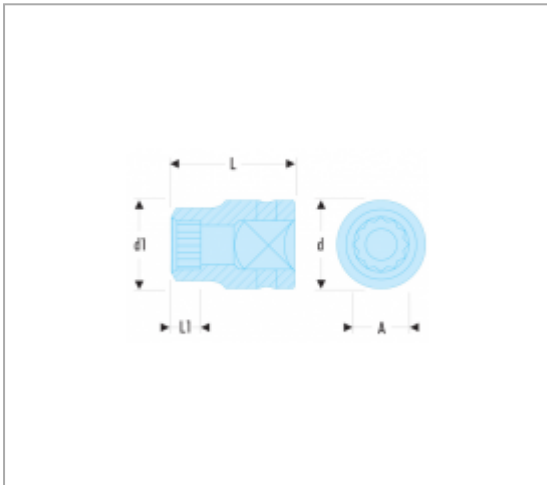

References :

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	12-POINT [MM]	BA	GA	[G]
NKD.17A	17	38	30,0	12	50	14	12	BA.30B	GA.31B	190
NKD.19A	19	38	32,5	14	50	14	12	BA.30B	GA.31B	220
NKD.21A	22	38	36,5		50	14	12	BA.30B	GA.31B	230
NKD.22A	21	38	50	16	50	14	12	BA.30B	GA.31B	230
NKD.23A	23	39,9	50		50	12,7	12	BA.30B	GA.31B	248
NKD.24A	24	39,9	50		50	13,9	12	BA.30B	GA.31B	249
NKD.26A	26	40,9	50		50	14,6	12	BA.30B	GA.31B	297
NKD.27A	27	40,9	50		50	15,8	12	BA.30B	GA.31B	297

	A [MM]	D [MM]	D1 [MM]	H3 [MM]	L [MM]	L1 [MM]	12- POIN [MM]	BA	GA	[G]
NKD.28A	28	43,9	50		50	16,3	12	BA.30B	GA.31B	330
NKD.29A	29	44	50		50	16,7	12	BA.30B	GA.31B	410
NKD.30A	30	44	50		50	16,7	12	BA.30B	GA.31B	410
NKD.32A	32	44	50		50	18,3	12	BA.30B	GA.31B	410
NKD.33A	33	44	56		56	19,1	12	BA.30B	GA.31B	500
NKD.34A	34	44	56		56	20,0	12	BA.30B	GA.31B	500
NKD.35A	35	44	56		56	20,1	12	BA.30B	GA.31B	520
NKD.36A	36	44	56		56	21,5	12	BA.30B	GA.31B	540
NKD.38A	38	44	56		56	22,3	12	BA.30B	GA.31B	540
NKD.41A	41	45	62		62	24,9	12	BA.30B	GA.31B	618
NKD.42A	42	45	62		62	25,4	12	BA.30B	GA.31B	679
NKD.46A	46	45	63		63	28,6	12	BA.30B	GA.31B	814
NKD.16A	16	38	38		50	14	12	BA.30B	GA.31B	185
NKD.18A	18	38	38		50	14	12	BA.30B	GA.31B	215